



Model 034M51/030

4-conductor, shielded, FEP cable, 30-ft, 4-socket plug to 4-socket plug, low outgassing

Installation and Operating Manual

**For assistance with the operation of this product,
contact the PCB Piezotronics, Inc.**

Toll-free: 716-684-0001

24-hour SensorLine: 716-684-0001

Fax: 716-684-0987

E-mail: info@pcb.com

Web: www.pcb.com



78656


PCB Piezotronics Inc. claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Piezotronics Inc.

RoHS CONTROLLED



ITEM MUST COMPLY WITH THE LATEST RoHS DIRECTIVE

REVISIONS


REV	DESCRIPTION	DIN
NR	RELEASED TO DRAFTING	54462

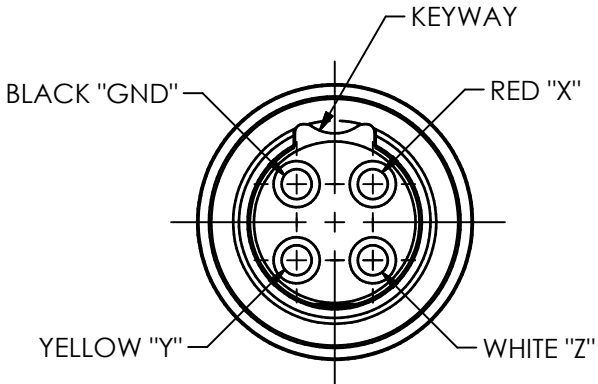

2X DETAIL A
SCALE 6X

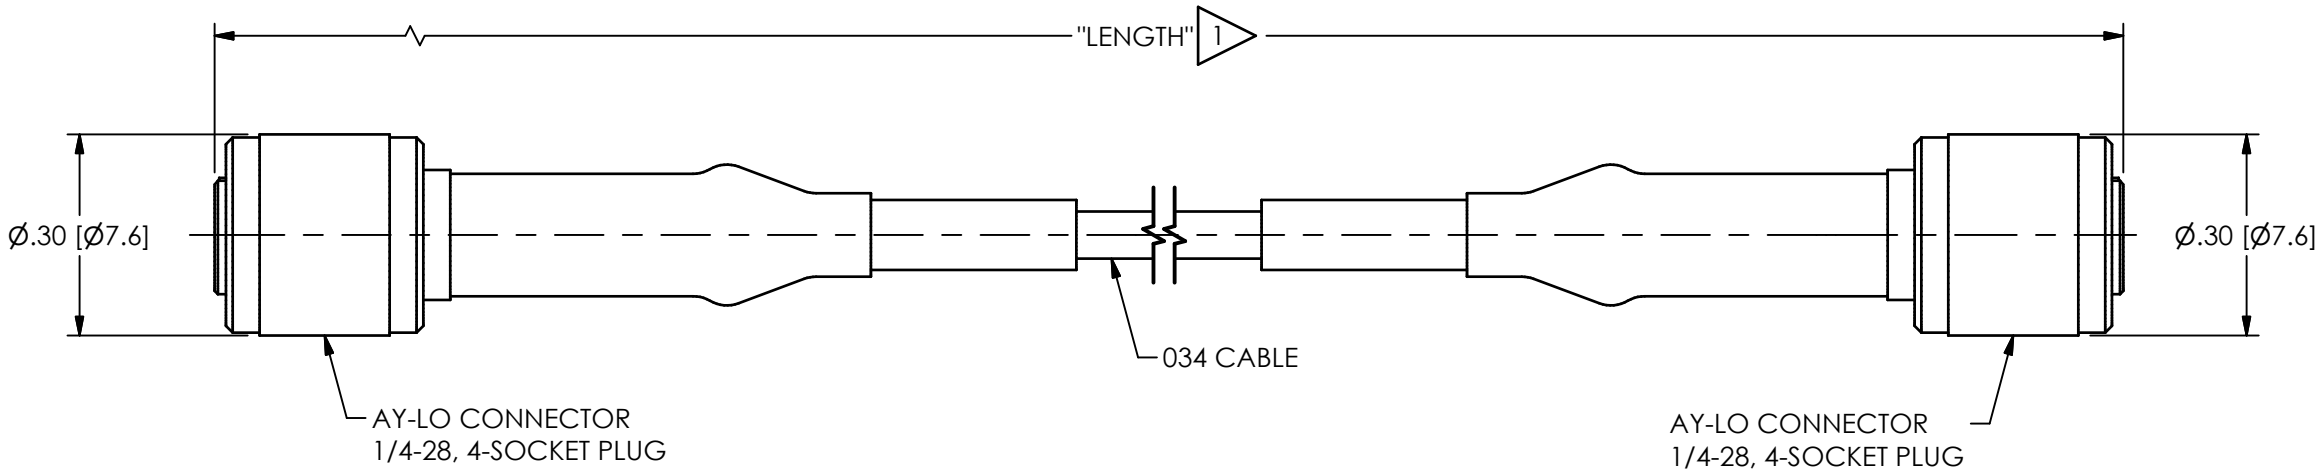

SCHEMATIC DIAGRAM

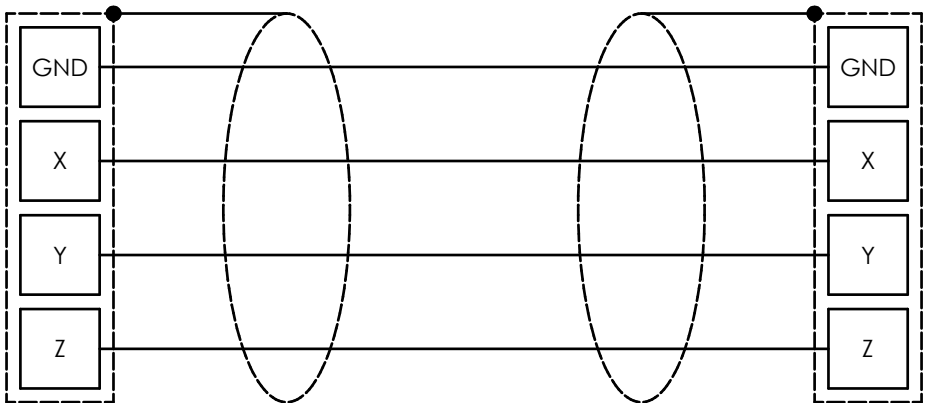

1 034M51 IS 40FT [12 m], 034M51/XXX MODELS WILL VARY IN FEET OR METERS DEPENDING ON THE MODEL

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:				DRAWN		CHECKED		ENGINEER		 PCB PIEZOTRONICS AN AMPHENOL COMPANY 3425 WALDEN AVE. DEPEW, NY 14043 (716) 684-0001 E-MAIL: sales@pcb.com
DIMENSIONS IN INCHES		DIMENSIONS IN MILLIMETERS [IN BRACKETS]		JJF	12/7/23	JJF	12/7/23	BAM	12/7/23	
DECIMALS XX ±.03 XXX ±.010		DECIMALS X ± 0.8 XX ± 0.25		TITLE OUTLINE DRAWING 034M51 SERIES						
ANGLES ± 2 DEGREES		ANGLES ± 2 DEGREES								
CABLE TOLERANCES IN ENGLISH		CABLE TOLERANCES IN METRIC								
1" ≤ LENGTH < 1' = +1" / - 0		2.54cm ≤ LENGTH < 30.5cm = +2.54cm / - 0								
1' ≤ LENGTH < 5' = +2" / - 0		30.5cm ≤ LENGTH < 1.5m = +5.1cm / - 0								
5' ≤ LENGTH < 100' = +6" / - 0		1.5m ≤ LENGTH < 30.5m = +15.2cm / - 0								
100' ≤ LENGTH = +1' / - 0		30.5m ≤ LENGTH = +30.5cm / - 0								
FILLETS AND RADII .003 - .005		FILLETS AND RADII 0.07 - 0.13								

CODE IDENT. NO. 52681	SHEET B	DWG. NO. 78656
SCALE: 4X		SHEET 1 OF 1