



1599

APPLICATION			REVISIONS				
NEXT ASS'Y	USED ON	VAR	REV	DESCRIPTION	ECN	DATE	APP'D

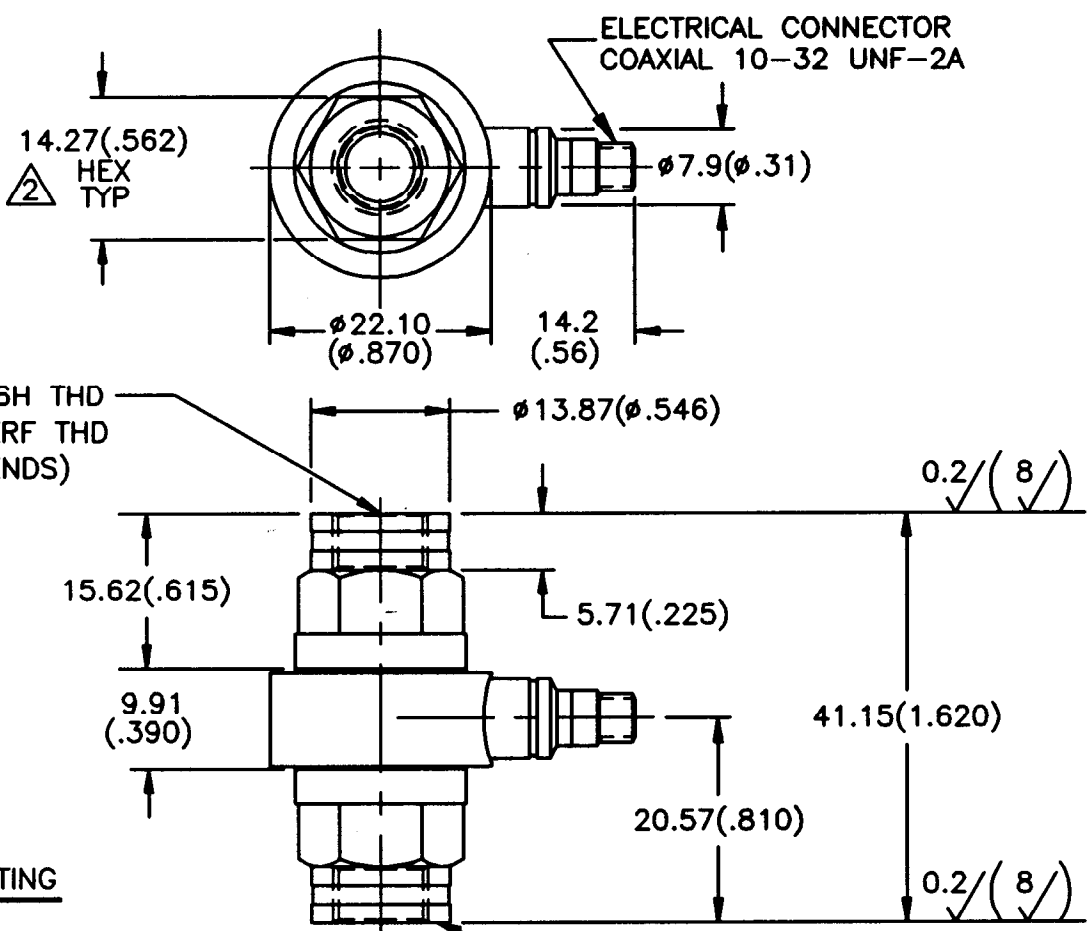

M10 X 1.0-6H THD  
7.6(.30) PERF THD  
(TYP BOTH ENDS)

ALTERNATE MOUNTING

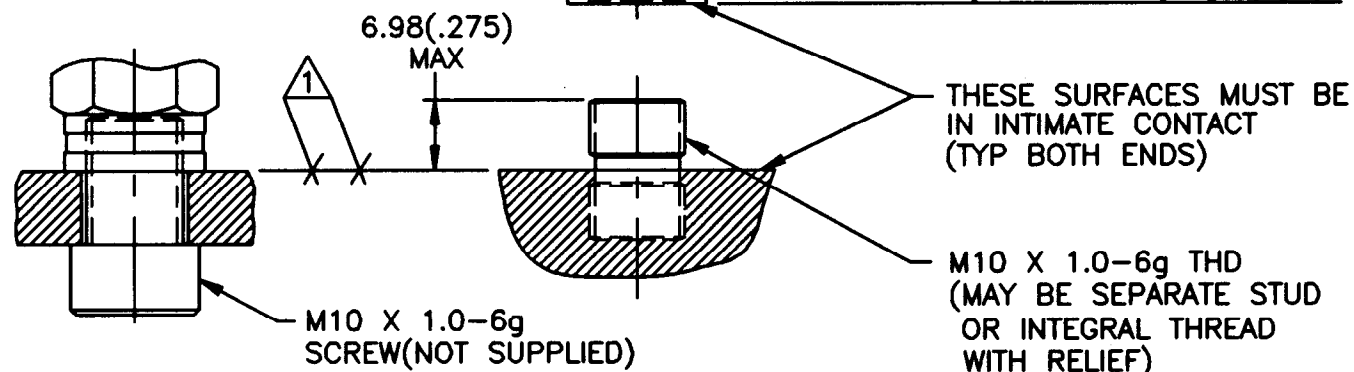

THESE SURFACES MUST BE IN INTIMATE CONTACT (TYP BOTH ENDS)

M10 X 1.0-6g THD (MAY BE SEPARATE STUD OR INTEGRAL THREAD WITH RELIEF)

M10 X 1.0-6g SCREW (NOT SUPPLIED)

- 4.) COMPRESSIVE FORCE RESULTS IN POSITIVE GOING OUTPUT VOLTAGE.
- 3.) EPOXY OR LOCTITE MAY BE USED ON THREADS TO LOCK FORCE LINK IN PLACE.
- 2. RECOMMENDED MOUNTING TORQUE ON 14.27(.562) HEX, 7-14 NEWTON METERS (5-10 FOOT POUNDS).
- 1. MOUNTING SURFACE MUST BE FLAT TO WITHIN 0.03(.001) TIR WITH A MIN 1.6 / (63 /).

UNLESS SPECIFIED TOLERANCES		DRAWN <i>Fab</i> 9/2/94 MFG <i>D.L.</i> 9/6/94 CHK'D <i>DM</i> 9/16/94 ENGR <i>PC</i> 9/7/94 APP'D <i>HS</i> 9/7/94 Sites <i>SGC</i> 9/7/94 TITLE INSTALLATION DRAWING MODEL M222B HERMETIC SEALED ICP FORCE LINK	<b>PCB</b> PIEZOTRONICS, INC. 3425 WALDEN AVE. DEPEW, NEW YORK 14043 PHONE: (716) 684-0001 CODE IDENT. NO. 52681 DWG. NO. 1599 SCALE: 1.33=1 SHEET 1 OF 1
DIMENSIONS IN INCHES (IN PARENTHESIS) DECIMALS XX ±.01 XXX ±.005 ANGLES ±2 DEGREES	DIMENSIONS IN MILLIMETERS DECIMALS X ±0.3 XX ±0.13 ANGLES ±2 DEGREES	FILLETS AND RADI 0.07 - 0.13 (.003 - .005)	