


PCB Piezotronics Inc. claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Piezotronics Inc.

REVISIONS		
REV	DESCRIPTION	DIN
B	UPDATED TO CURRENT STANDARDS	47846

5261


B

B

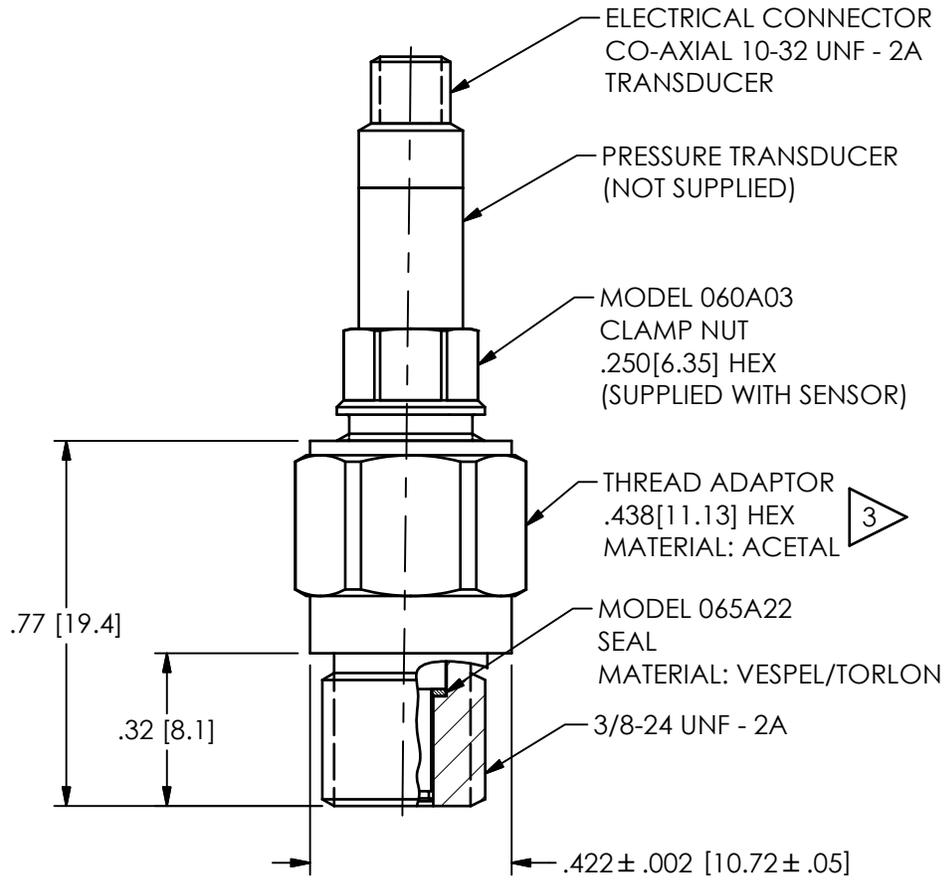

MOUNTING HOLE PREPERATION

∅.332[8.43] THRU  
3/8-24 UNF - 2B

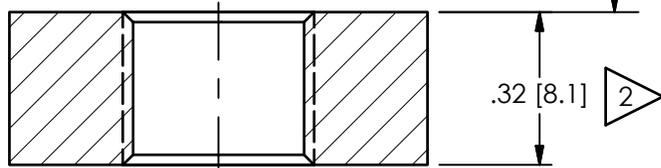

- 3 RECOMMENDED MOUNTING TORQUE ON THREAD ADAPTOR, 8-12 IN-LBS[0.9-1.4 Nm]
- 2 COUNTERBORE THICKER WALLS TO THIS DIMENSION
- 1 SEAL SURFACE MUST BE FLAT AND FREE OF TOOLS MARKS WITH A MINIMUM SURFACE FINISH OF 63[1.6]

A

A

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN		CHECKED		ENGINEER		PCB PIEZOTRONICS	
DIMENSIONS IN INCHES	DIMENSIONS IN MILLIMETERS [IN BRACKETS]	KRM	2/20/18	KRM	2/20/18	DRK	2/20/18	3425 WALDEN AVE. DEPEW, NY 14043 (716) 684-0001 E-MAIL: sales@pcb.com	
DECIMALS XX ±.01 XXX ±.005	DECIMALS X ± 0.3 XX ± 0.13	TITLE INSTALLATION DRAWING MODEL 061A59 THREAD ADAPTOR						CODE IDENT. NO. 52681	DWG. NO. 5261
ANGLES ± 2 DEGREES	ANGLES ± 2 DEGREES							SCALE: 2X	SHEET 1 OF 1
FILLETS AND RADII .003 - .005	FILLETS AND RADII 0.07 - 0.13								