
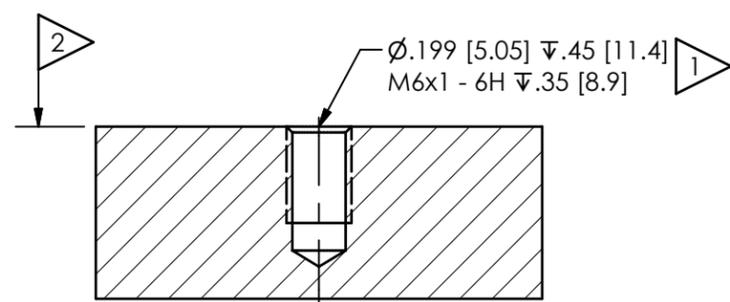
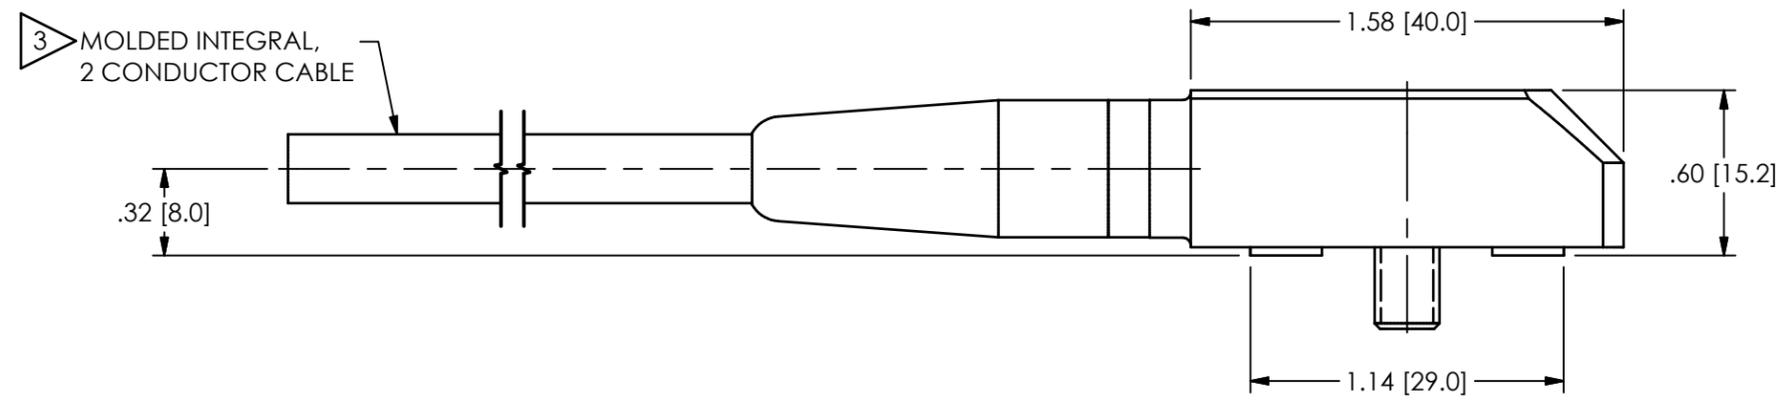


PCB Piezotronics Inc. claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Piezotronics Inc.

58625

REVISIONS		
REV	DESCRIPTION	DIN
B	ADDED NOTE #4	54044

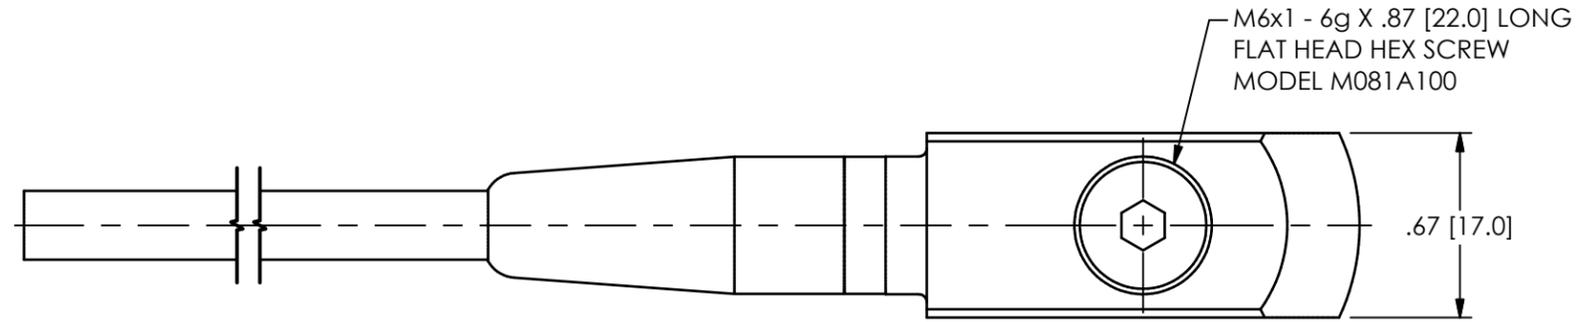

WIRE/CONDUCTOR COLOR REFERENCE	
RED	SIGNAL/POWER
BLUE	GROUND

4.) APPLY LUBRICANT (080A82 OR EQUIVALENT) TO THE THREADS AND THE HEAD OF THE MOUNTING BOLT

3 LENGTH OF CABLE AND TYPE OF END TERMINATION/CONNECTOR IS DESIGNED BY MODEL NUMBER

2 MOUNTING SURFACE MUST BE FLAT TO WITHIN .001 [.03] WITH AT LEAST A FINISH OF 125 [3.2]

1 DRILL PERPENDICULAR TO MOUNTING SURFACE TO WITHIN 1°

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:				DRAWN		CHECKED		ENGINEER	
DIMENSIONS IN INCHES		DIMENSIONS IN MILLIMETERS [IN BRACKETS]		NJF	07/27/23	JDM	07/27/23	RF	07/27/23
DECIMALS XX ±.01	DECIMALS X ±0.3	DECIMALS XXX ±.005	DECIMALS XX ±0.13	TITLE					
ANGLES ± 2 DEGREES		ANGLES ± 2 DEGREES		INSTALLATION DRAWING MODEL RHM240M40 SERIES STRAIN SENSOR					
CABLE TOLERANCES IN ENGLISH		CABLE TOLERANCES IN METRIC		CODE IDENT. NO.		DWG. NO.			
1" ≤ LENGTH < 1'	= +1"/ - 0	2.54cm ≤ LENGTH < 30.5cm	= +2.54cm / - 0	52681		58625			
1' ≤ LENGTH < 5'	= +2"/ - 0	30.5cm ≤ LENGTH < 1.5m	= +5.1cm / - 0	SCALE: 1.5X		SHEET 1 OF 1			
5' ≤ LENGTH < 100'	= +6"/ - 0	1.5m ≤ LENGTH < 30.5m	= +15.2cm / - 0						
100' ≤ LENGTH	= +1' / - 0	30.5m ≤ LENGTH	= +30.5cm / - 0						
FILLETS AND RADII .003 - .005		FILLETS AND RADII 0.07 - 0.13							

PCB PIEZOTRONICS
AN AMPHENOL COMPANY

3425 WALDEN AVE. DEPEW, NY 14043
(716) 684-0001 E-MAIL: sales@pcb.com