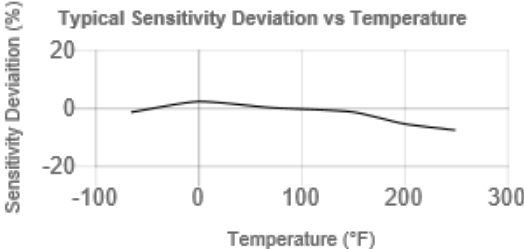


Model Number 603C05	LOW-COST INDUSTRIAL ICP® ACCELEROMETER			Revision: B ECN #: 56388
Performance		ENGLISH	SI	OPTIONAL VERSIONS Optional versions have identical specifications and accessories as listed for the standard model except where noted below. More than one option may be used. EX - Hazardous Area Approval- contact factory for specific approvals TO - Temperature Output Temperature Output Range Temperature Scale Factor Electrical Connector Electrical Connections(Pin A) Electrical Connections(Pin B) Electrical Connections(Pin C) Size - Height Weight
Sensitivity(± 20 %)	50 mV/g	5.1 mV/(m/s ²)	[1]	
Measurement Range	± 100 g	± 981 m/s ²		
Frequency Range(± 3 dB)	30 to 600,000 cpm	0.5 to 10,000 Hz	[2]	
Resonant Frequency	1,500 kcpm	25 kHz	[3]	
Broadband Resolution(1 to 10,000 Hz)	750 µg	7,358 µm/s ²	[3]	
Non-Linearity	± 1 %	± 1 %	[4]	
Transverse Sensitivity	≤ 7 %	≤ 7 %		
Environmental				
Overload Limit(Shock)	5,000 g pk	49,050 m/s ² pk		
Temperature Range	-65 to +250 °F	-54 to +121 °C		
Temperature Response	See Graph	See Graph	[3]	
Enclosure Rating	IP68	IP68		
Electrical				
Settling Time(within 1% of bias)	≤ 2.0 sec	≤ 2.0 sec		
Discharge Time Constant	≥ 0.4 sec	≥ 0.4 sec		
Excitation Voltage	18 to 28 VDC	18 to 28 VDC		
Constant Current Excitation	2 to 20 mA	2 to 20 mA		
Output Impedance	< 150 Ohm	< 150 Ohm		
Output Bias Voltage	8 to 12 VDC	8 to 12 VDC		
Spectral Noise(10 Hz)	18 µg/√Hz	176 (µm/s ²)/√Hz	[3]	
Spectral Noise(100 Hz)	10 µg/√Hz	98.1 (µm/s ²)/√Hz	[3]	
Spectral Noise(1 kHz)	7 µg/√Hz	68.7 (µm/s ²)/√Hz	[3]	
Electrical Isolation(Case)	> 10 ⁸ Ohm	> 10 ⁸ Ohm		
Physical				
Size (Hex x Height)	11/16 in x 1.65 in	18 mm x 42.2 mm		
Weight	1.8 oz	51 gm		
Mounting Thread	1/4-28 Female	No Metric Equivalent	[5]	
Mounting Torque	2 to 5 ft-lb	2.7 to 6.8 Nm		
Sensing Element	Ceramic	Ceramic		
Sensing Geometry	Shear	Shear		
Housing Material	Stainless Steel	Stainless Steel		
Sealing	Welded Hermetic	Welded Hermetic		
Electrical Connector	2-Pin MIL-C-5015	2-Pin MIL-C-5015		
Electrical Connection Position	Top	Top		
CE UK CA [6] Typical Sensitivity Deviation vs Temperature  Ex ETL Intertek [7] All specifications are at room temperature unless otherwise specified. In the interest of constant product improvement, we reserve the right to change specifications without notice. ICP® is a registered trademark of PCB Piezotronics, Inc.				
NOTES: [1]Conversion Factor 1g = 9.81 m/s ² . [2]The high frequency tolerance is accurate within ±10% of the specified frequency. [3]Typical. [4]Zero-based, least-squares, straight line method. [5]1/4-28 has no equivalent in S.I. units. [6]See PCB Declaration of Conformance PS023 or PS060 for details. [7]See Model's "Instructions For Use" (IFU) for North American Conformity and Certification Statements.				
SUPPLIED ACCESSORIES: Model 081A40 Mounting Stud Model ICS-2 NIST-traceable single-point amplitude response calibration at 6000 cpm (100 Hz) for each axis (1)				
Entered: ND	Engineer: NJF	Sales: JL	Approved: NJF	Spec Number:
Date: 04/17/2026	Date: 04/17/2026	Date: 04/17/2026	Date: 04/17/2026	38270
 IMI SENSORS A PCB PIEZOTRONICS DIV. 3425 Walden Avenue, Depew, NY 14043 Phone: 800-959-4464 Fax: 716-684-3823 E-Mail: imi@pcb.com				