
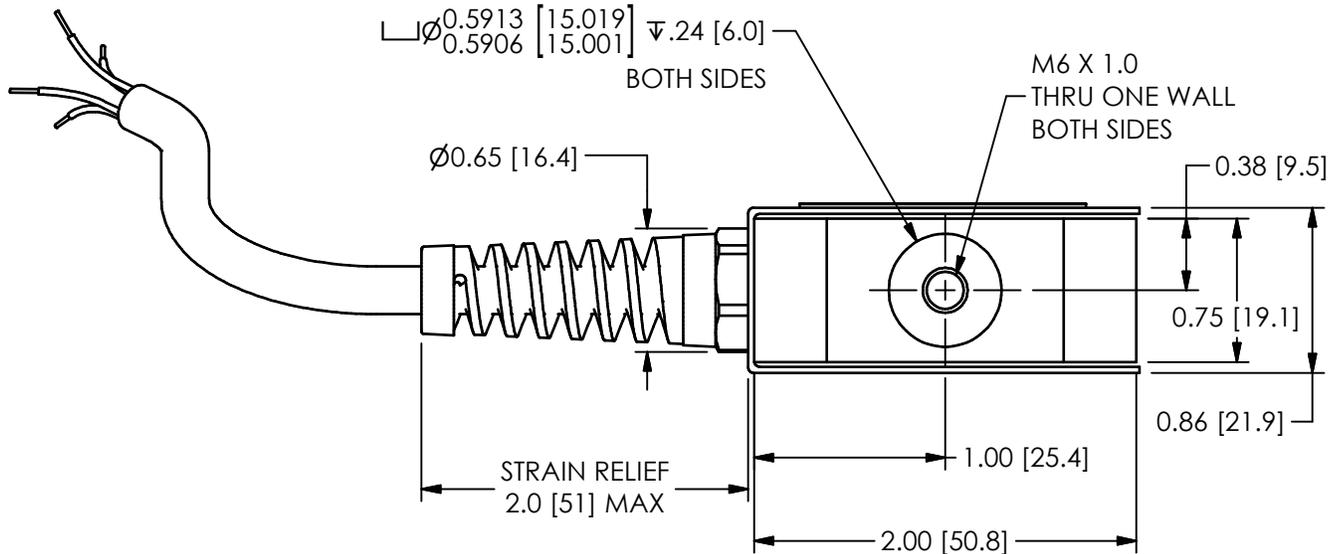


PCB Load & Torque (A Division of PCB Piezotronics, Inc.) claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Load and Torque.

REVISIONS		
REV	DESCRIPTION	ECO
NR	RELEASED FOR PRODUCTION - 09.07.16, PTE	45883

64949

4 CONDUCTOR BLACK SHIELDED  
 CABLE 6.0 FT (1.8 m) LONG  
 TERMINATING IN PIGTAILS:  
 RED: +POWER  
 BLACK: -POWER  
 WHITE: +SIGNAL  
 GREEN: - SIGNAL

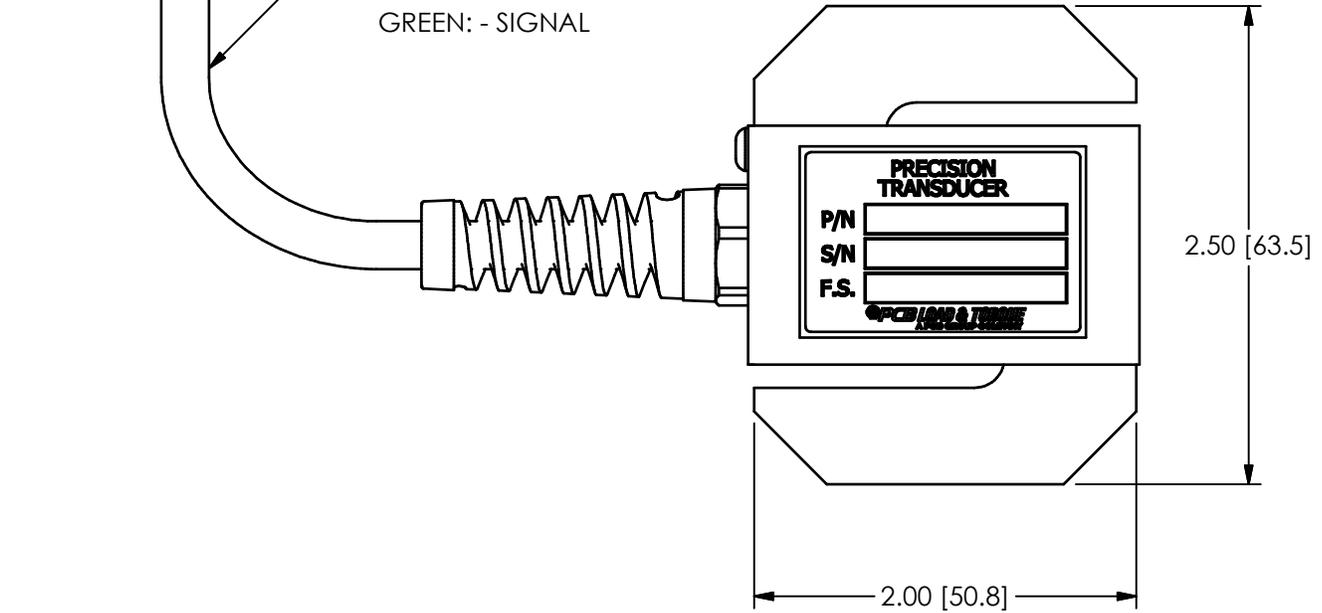

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN	CHECKED	ENGINEER		 <b>PCB LOAD &amp; TORQUE</b> A PCB GROUP COMPANY 24350 Indoplex Circle, Farmington Hills, MI 48335 (248) 888-8260 E-MAIL: linfo@pcb.com DWG. NO. <h1 style="text-align: center;">64949</h1>		
DIMENSIONS IN INCHES	DIMENSIONS IN MILLIMETERS [IN BRACKETS]	JSD	07.15.16	JAM	08.27.16		JSD	07.15.16
DECIMALS XX ±.01 XXX ±.005	DECIMALS X ±.3 XX ±.13	TITLE <h2 style="text-align: center;">OUTLINE DRAWING</h2> <h3 style="text-align: center;">S-CELL (5K OHM)</h3> <h3 style="text-align: center;">w/M6x1.0 THREADS</h3>						
ANGLES ± .5 DEGREES	ANGLES ± .5 DEGREES							
FILLETS AND RADII .015 MAX	FILLETS AND RADII 0.38 MAX	SCALE: FULL				SHEET 1 OF 1		