


PCB Piezotronics Inc. claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Piezotronics Inc.


71433

REVISIONS

REV	DESCRIPTION	DIN
A	UPDATED TO SHOW THIRD MOUNTING HOLE	50132

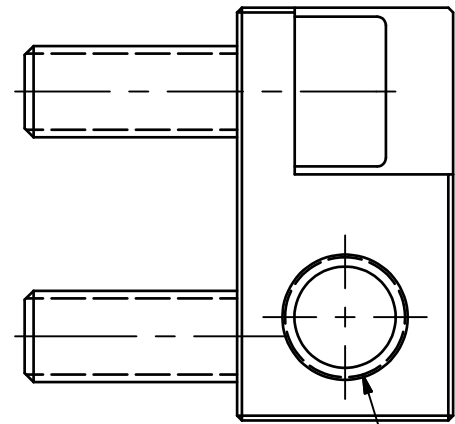


3X 1/4-28 UNF - 2B  $\nabla$ .250 [6.35]

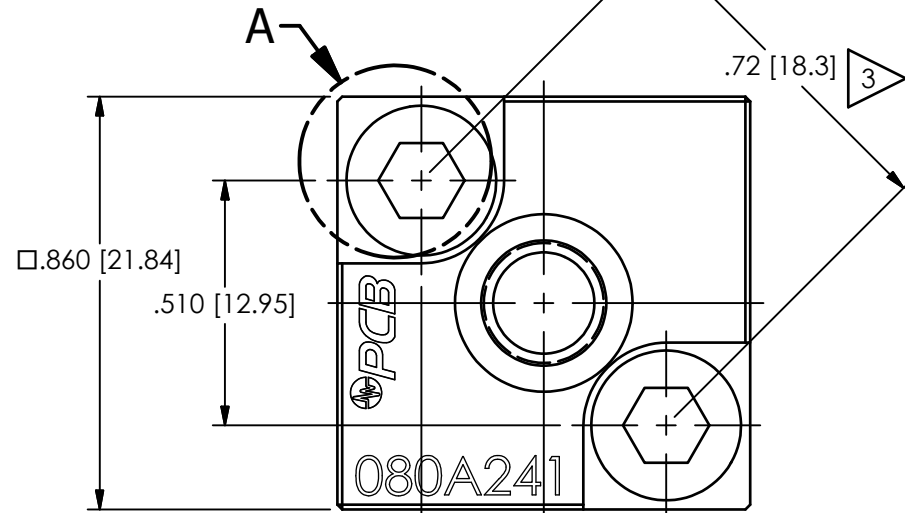

080A241: MOUNTING BLOCK TITANIUM


081A46: SOCKET HEAD CAP SCREW 10-32 UNF-2A X .563 [14.30] LONG (2 SUPPLIED)

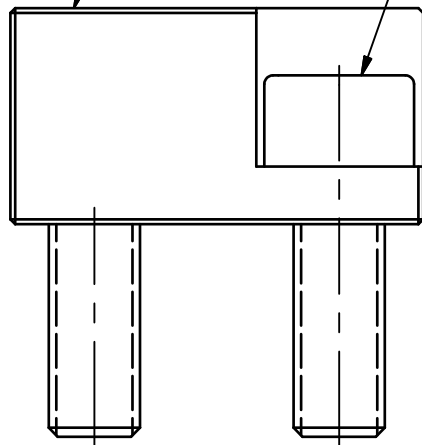

.450 [11.43]

2X .120 [3.05]


2X  $\varnothing$ .204 [5.18] THRU



DETAIL A  
(081A46 NOT SHOWN)

MOUNTING HOLE PREPARATION:

2X 10-32 UNF - 2B  $\nabla$ .45 [11.4] MIN  $\nabla$  1

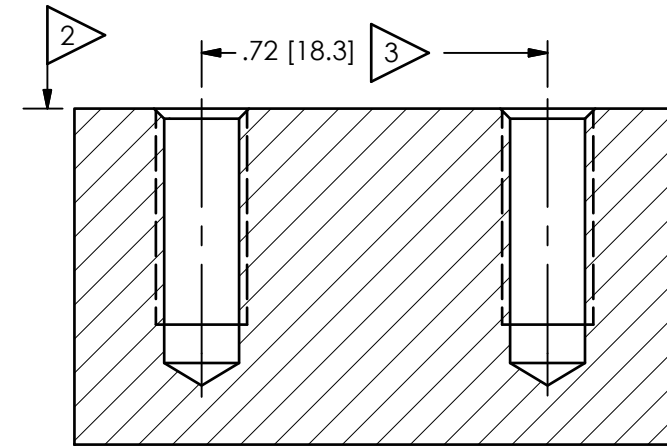

- $\nabla$  4 RECOMMENDED MOUNTING TORQUE 10-20 in-lbs [113-225 Ncm]
- $\nabla$  3 DIAGONAL MOUNTING DIMENSION BETWEEN MOUNTING HOLES
- $\nabla$  2 MOUNTING SURFACE SHOULD BE FLAT TO WITHIN .001 [.03] TIR OVER  $\varnothing$ 1.5 [ $\varnothing$ 38] WITH A MINIMUM 63 [1.6] OR BETTER SURFACE FINISH FOR BEST RESULTS
- $\nabla$  1 DRILL PERPENDICULAR TO MOUNTING SURFACE TO WITHIN  $\pm$ 1°

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN		CHECKED		ENGINEER	
DIMENSIONS IN INCHES	DIMENSIONS IN MILLIMETERS [IN BRACKETS]	JES	11/5/19	JDM	11/5/19	GCD	11/5/19
DECIMALS XX $\pm$ .01 XXX $\pm$ .005	DECIMALS X $\pm$ .3 XX $\pm$ .13	TITLE INSTALLATION DRAWING MODEL 080A241 TRIAxIAL MOUNTING BLOCK					
ANGLES $\pm$ 2 DEGREES	ANGLES $\pm$ 2 DEGREES						
FILLETS AND RADII .003 - .005	FILLETS AND RADII 0.07 - 0.13	CODE IDENT. NO. 52681		DWG. NO. 71433		3425 WALDEN AVE. DEPEW, NY 14043 (716) 684-0001 E-MAIL: sales@pcb.com	
		SCALE: 3X		SHEET 1 OF 1			

**PCB PIEZOTRONICS**

3425 WALDEN AVE. DEPEW, NY 14043  
(716) 684-0001 E-MAIL: sales@pcb.com

CODE IDENT. NO. 52681 DWG. NO. 71433

SCALE: 3X SHEET 1 OF 1