
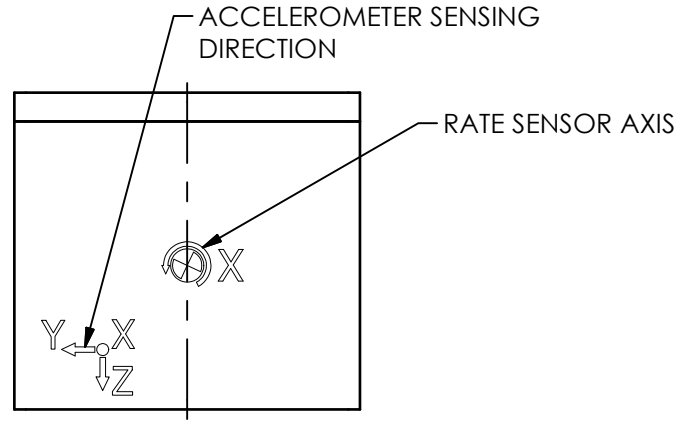
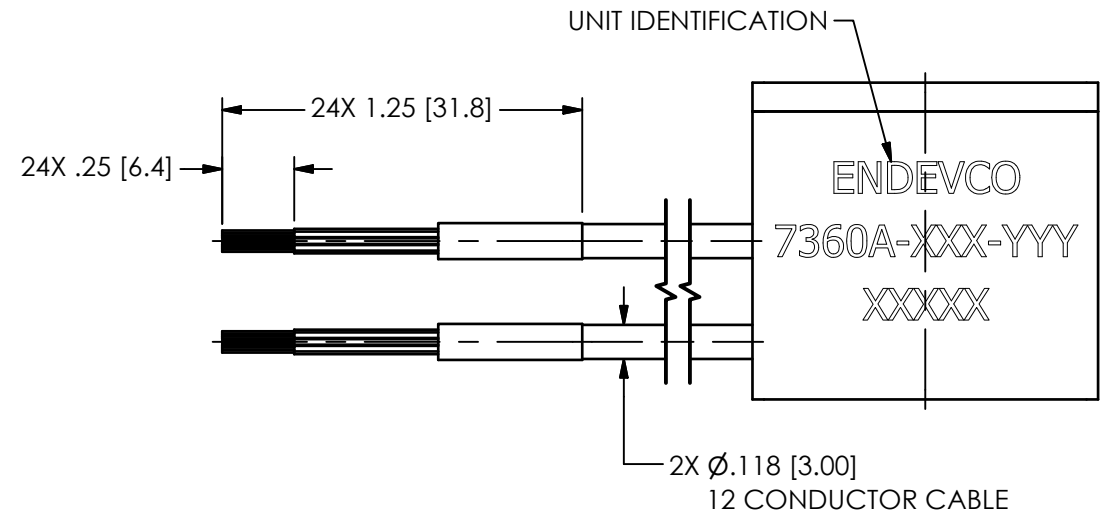
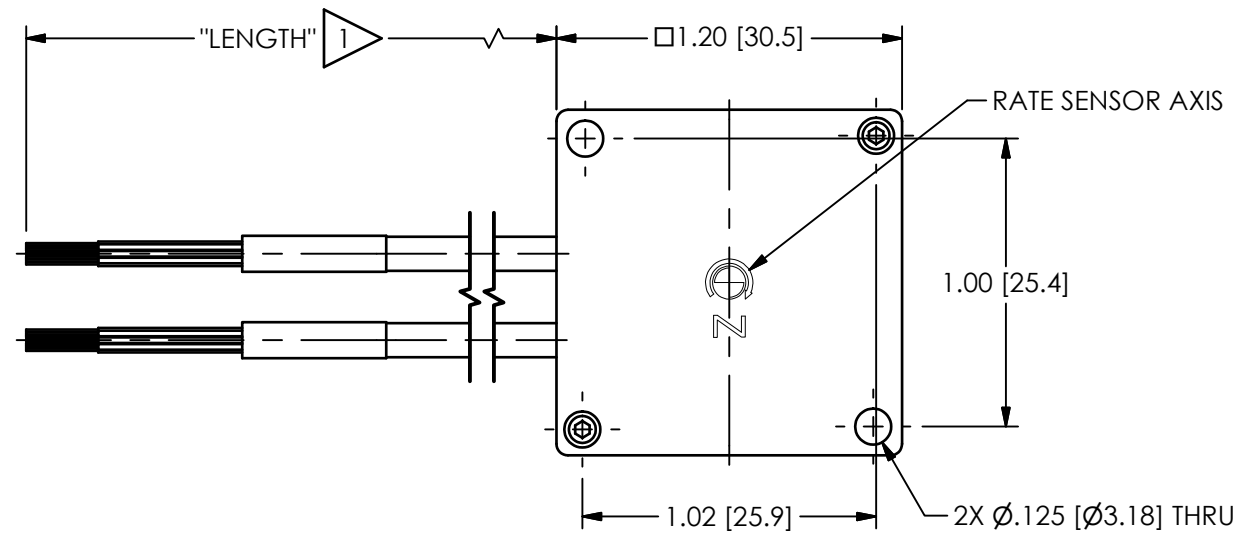
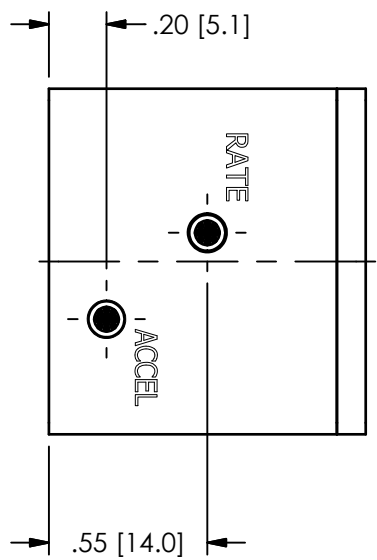
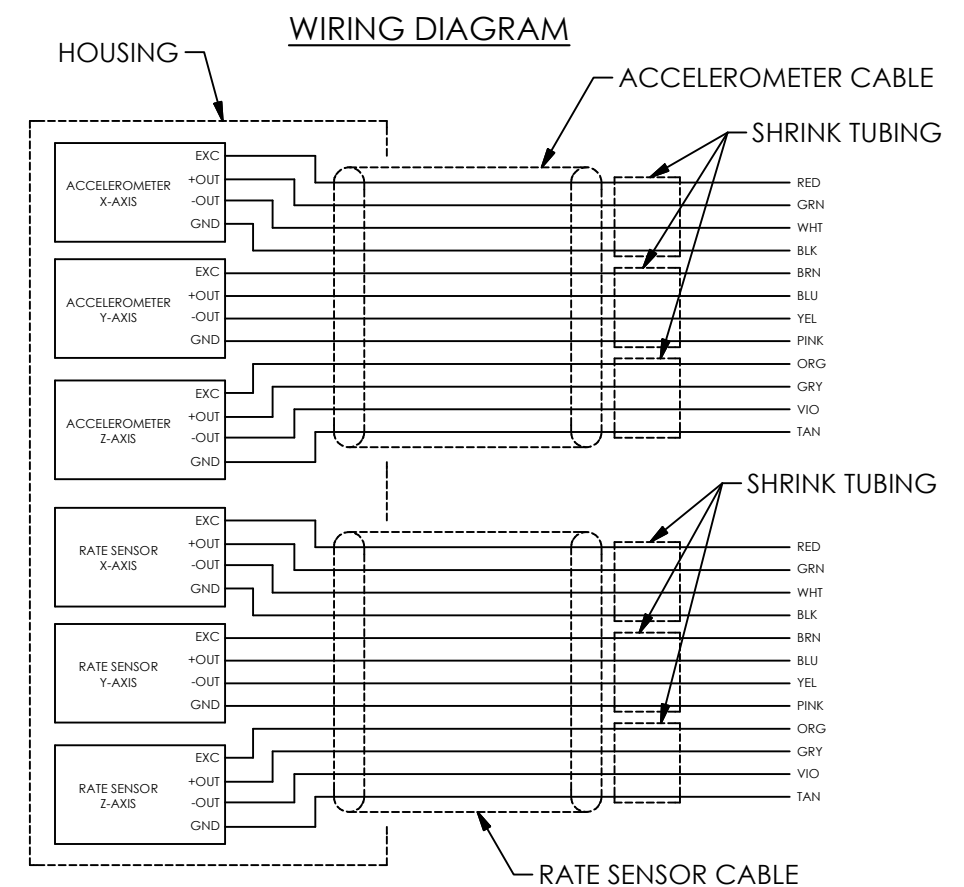


PCB Piezotronics of NC, Inc. (DBA Endevco) claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Piezotronics of NC, Inc. (DBA Endevco)

76835

REVISIONS		
REV	DESCRIPTION	DIN
NR	RELEASED TO DRAFTING	53059

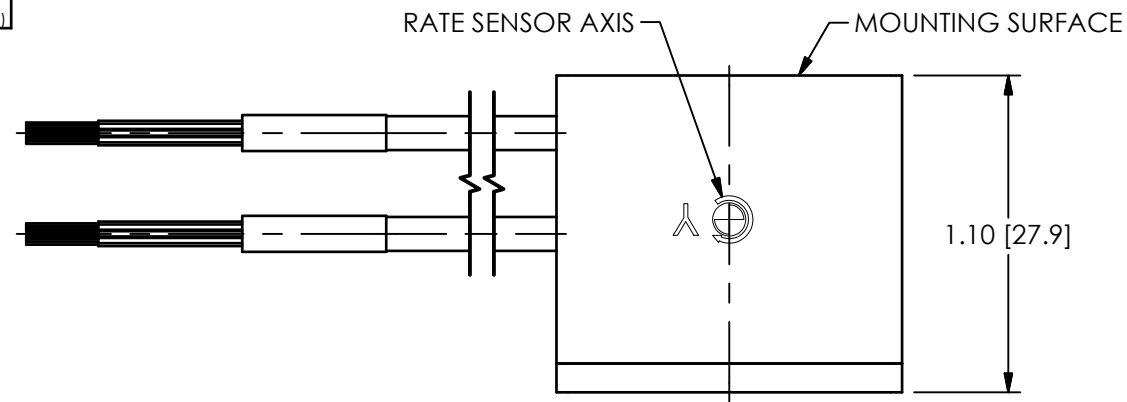

RATE SENSOR CABLE			
CONTACT	X-AXIS	Y-AXIS	Z-AXIS
EXC	RED	BRN	ORG
+OUT	GRN	BLU	GRY
-OUT	WHT	YEL	VIO
GND	BLK	PINK	TAN

ACCELEROMETER CABLE			
CONTACT	X-AXIS	Y-AXIS	Z-AXIS
EXC	RED	BRN	ORG
+OUT	GRN	BLU	GRY
-OUT	WHT	YEL	VIO
GND	BLK	PINK	TAN

1 CABLE LENGTH IN INCHES, I.E. 7360A-XXX-YYY-120 HAS 2 CABLES, EACH WITH A LENGTH OF 120 IN [3.5m]. TOLERANCE BETWEEN THE TWO MAY VARY, AS LONG AS BOTH CABLES ARE WITHIN THE TOLERANCE RANGE

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN		CHECKED		ENGINEER	
DIMENSIONS IN INCHES		JJF	8/17/22	JJF	8/17/22	HX	8/17/22
DECIMALS XX ±.03 XXX ±.010		TITLE					
ANGLES ± 2 DEGREES		OUTLINE DRAWING 7360A SERIES					
CABLE TOLERANCES IN ENGLISH		SCALE: 1.5X SHEET 1 OF 1					
1" ≤ LENGTH < 1' = +1"/-0							
1' ≤ LENGTH < 5' = +2"/-0							
5' ≤ LENGTH < 100' = +6"/-0							
100' ≤ LENGTH = +1"/-0							
FILLETS AND RADII .003 - .005							
DIMENSIONS IN MILLIMETERS [IN BRACKETS]							
DECIMALS X ± 0.8 XX ± 0.25							
ANGLES ± 2 DEGREES							
CABLE TOLERANCES IN METRIC							
2.54cm ≤ LENGTH < 30.5cm = +2.54cm/-0							
30.5cm ≤ LENGTH < 1.5m = +5.1cm/-0							
1.5m ≤ LENGTH < 30.5m = +15.2cm/-0							
30.5m ≤ LENGTH = +30.5cm/-0							
FILLETS AND RADII 0.07 - 0.13							

ENDEVCO
AN AMPHENOL COMPANY
PCB PIEZOTRONICS OF NC, INC (DBA ENDEVCO)
10869 NC HIGHWAY 903, HALIFAX, NC 27839

CODE IDENT. NO. BDN13
DWG. NO. **76835**