




Triaxial low g DC accelerometer

Model 773

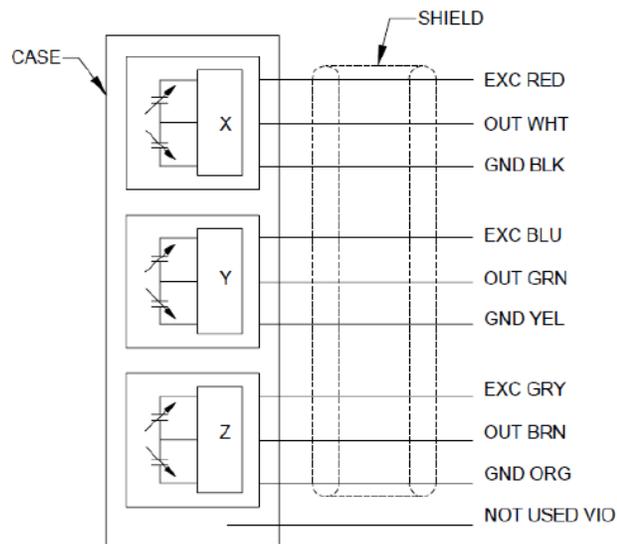

ISOMETRIC VIEW
FOR REFERENCE ONLY

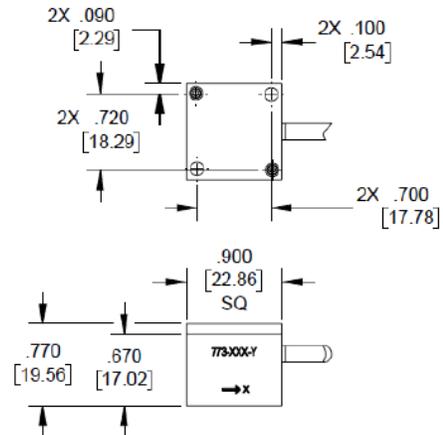

SCHEMATIC

STANDARD TOLERANCE
INCHES [MILLIMETERS]
.XX = ± .02 [X = ± .5]
XXX = ± .010 [XX = ± .25]

SOL

Key features

- 2, 10, 30, 50, 100 and 200 g ranges
- Each axis has separate power and ground
- Frequency response from DC up to 2,000 Hz
- Rugged housing and cable
- Operating temperature from -40° C to 100°C

Description

The ENDEVCO® Model 773 is a triaxial low g DC accelerometer that utilizes unique variable capacitance microsensors. This accelerometer is designed for measurement of relatively low level accelerations in automotive ride quality, motorsports and high speed rail applications where measurement of whole body motion immediately after the accelerometer is subjected to a shock motion and in the presence of severe vibrational inputs is required.

The 773 accelerometer is available with a choice of two power options. One option (U) allows for operation from 7V to 36V. The second option (R) allows for operation at a regulated excitation voltage of 5V. The accelerometer provides single-ended output with a 2.5V output bias voltage.

Triaxial low g DC accelerometer Model 773

Specifications

All specifications assume +75°F (+24°C) unless otherwise stated. Calibration voltage for -R units is 5Vdc and for -U units is 15 Vdc.

Dynamic Characteristics	Units	-2	-10	-30	-50	-100	-200
Range	g	±2	±10	±30	±50	±100	±200
Sensitivity	mV/g	1000	200	66	40	20	10
		±50	±10	±4	±2	±1.0	±1.0
Frequency response (±5%, ref 100 Hz) typical	Hz	0-200	0-750	0-750	0-750	0-1000	0-1000
Frequency response (±1dB, ref 100 Hz) max	Hz	0-300	0-1500	0-2000	0-2000	0-2000	0-2000
Frequency response (±3dB, ref 100 Hz) typical	Hz	0-550	0-2500	0-2800	0-2800	0-5000	0-5000
Zero measurand output	mV	2500	2500	2500	2500	2500	2500
		±50	±50	±50	±50	±50	±50
Transverse sensitivity	%	3.0	3.0	3.0	3.0	3.0	3.0
Thermal zero shift (max) -40°C to +100°C (-40°F to 212°F)	%FSO [1]	±2.0	±2.0	±2.0	±2.0	±2.0	±2.0
Thermal sens shift (max) -40°C to +100°C (-40°F to +212°F)	%	±2.0	±2.0	±2.0	±2.0	±2.0	±2.0
Combined non-linearity (BFSL) and hysteresis	%FSO	±0.5	±0.5	±0.5	±0.5	±0.5	±0.5
Natural frequency, typ	Hz	1300	2700	5500	5500	9800	9800
Threshold (resolution) [2]	equiv. g's.	.0002	.001	.003	.005	.01	.02
Electrical							
Excitation voltage		5 Vdc					
For option "R" supply voltage		7 to 36 Vdc					
For option "U" supply voltage		8mA max each axis, 24 mA max total					
Current drain		100 ohms max					
Output impedance		10K ohms resistance minimum					
Load		50 pF capacitance maximum					
Residual noise		50 µVrms typ, 100 uVrms max; 0.5 to 100 Hz					
Input voltage protection		500 µVrms typ, 1.0 mVrms max; 0.5Hz to 10 kHz					
Insulation resistance		Reverse polarity protected (for "U" option only)					
Case to leads shorted together		100 Meg Ohms minimum at 50 Vdc					
Shield to leads shorted together							
Physical							
Weight (typical)		24 grams (without cable) plus cable at 20 grams/meter					
Case material		Anodized aluminum alloy.					
Cable type		Integral 10 conductor, # 28 AWG PVC insulated leads, Shielded with black PVC jacket.					
Mounting/torque		Mounting 2x #4 or M3 Screws / 6 lb-in (0.7 N-m)					
Environmental							
Shock limit		10000g (0.15 mS haversine pulse)					
Temperature							
Operating Range		-40°F to +212°F (-40°C to +100°C)					
Storage Range		-40°F to +212°F (-40°C to +100°C)					
Humidity		IP67					
Calibration data							
Sensitivity		Measured at 1g and 100 Hz for the -2					
		Measured at 10 g and 100Hz for the -10, -30, -50, -100 and -200					
Frequency response		Measured at 1g, 20 to 1000 Hz for the -2					
		Measured at 10 g, 20 to 10000 Hz for the -10, -30, -50,-100 and -200					
Zero measurand output		Measured at room temperature					

Triaxial low g DC accelerometer Model 773


Accessories

Product	Description	773
EH864	4-40 Socket Head Cap Screw, 1" length, 2x	Included
EHW289	Washer, 2x	Included

Notes

1. Full scale output (FSO) is nominally 4 volts
2. Threshold = [2x Max residual noise, .5 to 100Hz] / sensitivity
3. Model number definition:

773 - XXX - Y - ZZZ

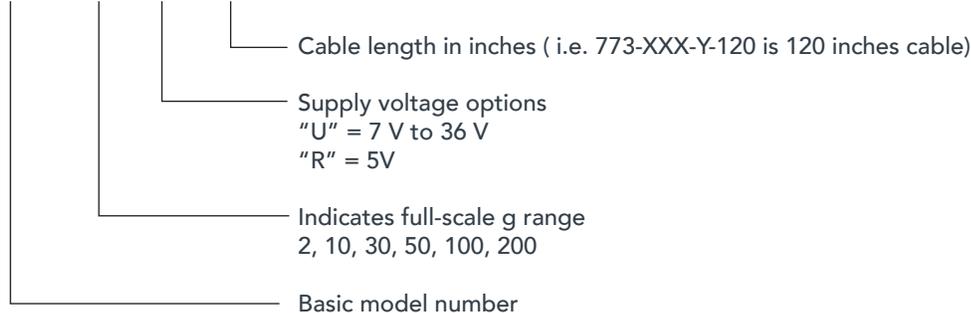

Ordering information

1. Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 866-ENDEVCO for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.