



PCB Piezotronics of NC, Inc. (DBA Endevco) claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Piezotronics of NC, Inc. (DBA Endevco)

1		
REVISIONS		
REV	DESCRIPTION	DIN
A	UPDATED MODEL & NOTES	55939

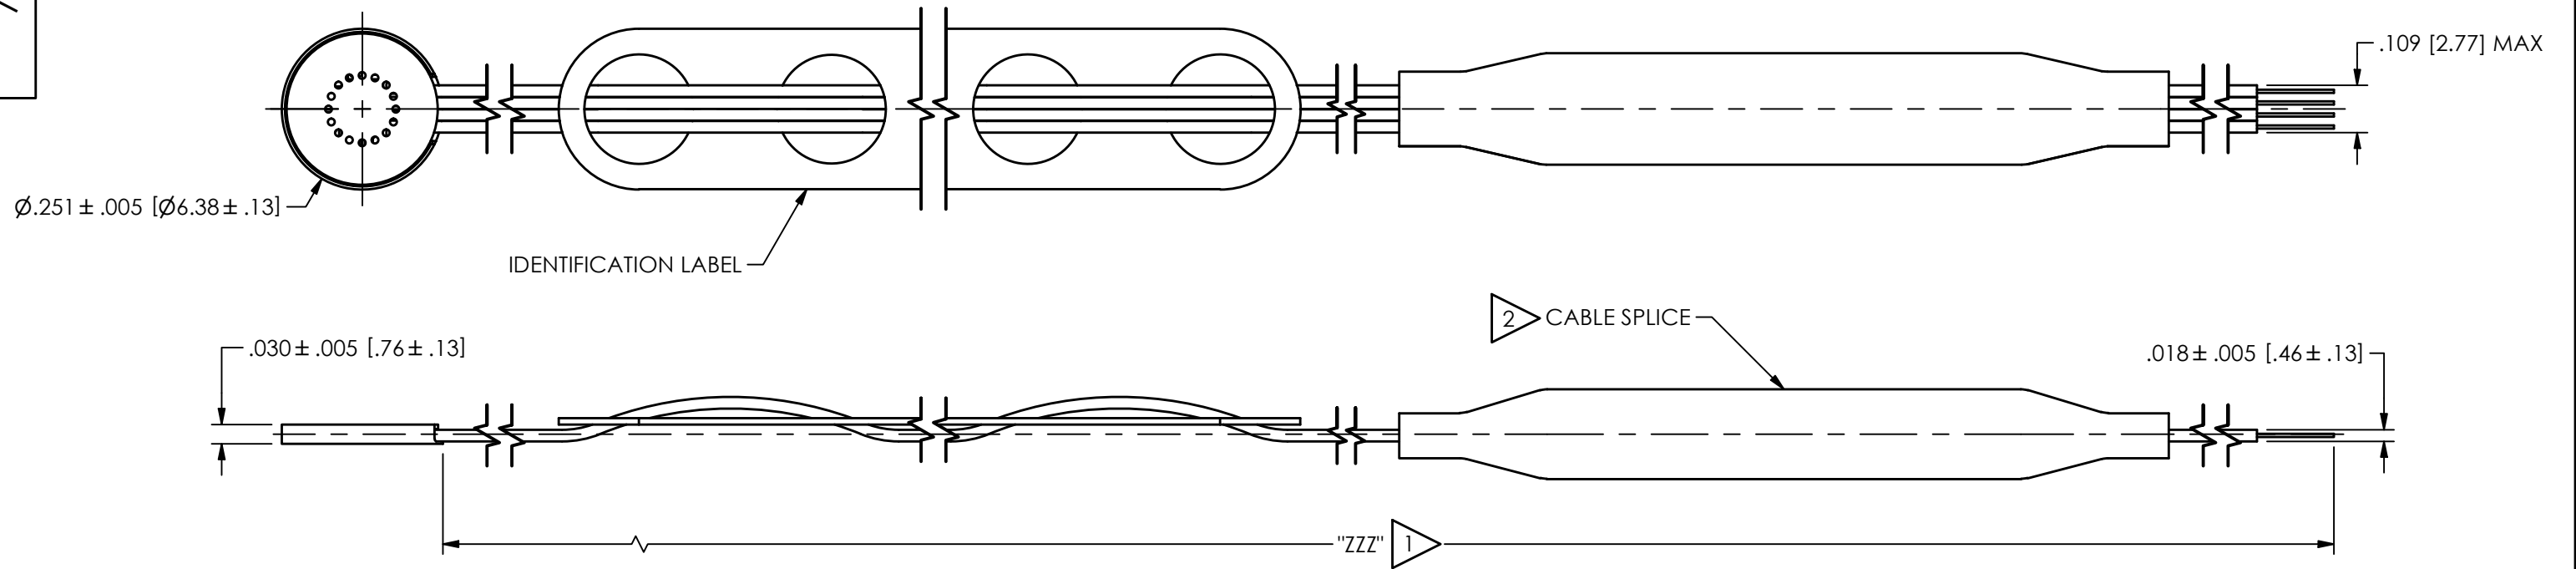


ELECTRICAL SCHEMATIC

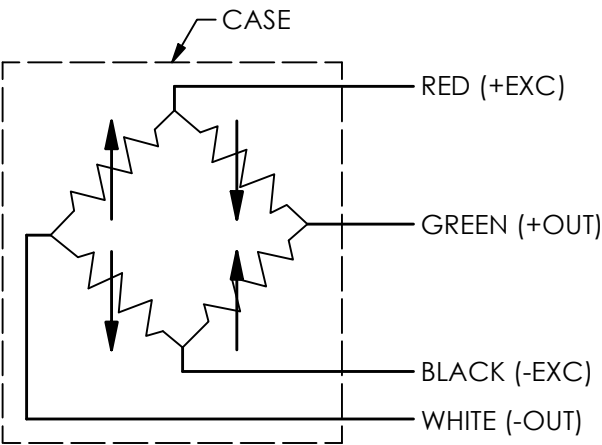

- 3.) RECOMMENDED MOUNTING METHOD (ELASTOMER MOUNTING) IS .002"-.005" [.05-.13] THICKNESS OF RTV ADHESIVE, SUCH AS DOW CORNING SILASTIC® 738 OR GENERAL ELECTRIC RTV 118. AN ALTERNATE MOUNT (RIGID MOUNT) MAY BE UTILIZED USING CYANOACRYLATE.

CAUTION: USE OF A RIGID ADHESIVE MAKES REMOVAL OF PRESSURE TRANSDUCER WITHOUT DAMAGE DIFFICULT.
CAUTION: USING SOLVENT TO REMOVE THE ADHESIVE, MAY DAMAGE INTERNAL JOINTS TO THE UNIT.

- 2 CABLE SPLICE USED ON CABLE LENGTHS GREATER THAN 36 [914]
- 1 ZZZ = CABLE LENGTH IN INCHES
- A.) IF NO CABLE LENGTH SPECIFIED, THE DEFAULT IS 30 [762]
- B.) IF THE CABLE IS GREATER THAN 36 [914], A SPLICE WILL BE APPLIED AT THE 30 [762] LOCATION

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN		CHECKED		ENGINEER		<div>ENDEVCO AN AMPHENOL COMPANY PCB PIEZOTRONICS OF NC, INC (DBA ENDEVCO) 10869 NC HIGHWAY 903, HALIFAX, NC 27839</div>		
DIMENSIONS IN INCHES		DIMENSIONS IN MILLIMETERS [IN BRACKETS]		AME	8/25/25	JDM	8/25/25		MJP	8/25/25
DECIMALS XX ±.03 XXX ±.010		DECIMALS X ± 0.8 XX ± 0.25		TITLE OUTLINE DRAWING 8515C SERIES PRESSURE TRANSDUCER						
ANGLES ± 2 DEGREES		ANGLES ± 2 DEGREES								
CABLE TOLERANCES IN ENGLISH		CABLE TOLERANCES IN METRIC								
1"≤ LENGTH < 1' = +1"/ - 0 1'≤ LENGTH < 5' = +2"/ - 0 5'≤ LENGTH < 100' = +6"/ - 0 100'≤ LENGTH = +1"/ - 0		2.54cm ≤ LENGTH < 30.5cm = +.54cm/ - 0 30.5cm ≤ LENGTH < 1.5m = +.1cm/ - 0 1.5m ≤ LENGTH < 30.5m = +15.2cm/ - 0 30.5m ≤ LENGTH = +30.5cm/ - 0								
FILLETS AND RADII .003 - .005		FILLETS AND RADII 0.07 - 0.13		CODE IDENT. NO. 8DN13						
				DWG. NO. 79467						
				SCALE: 4X						
				SHEET 1 OF 1						