
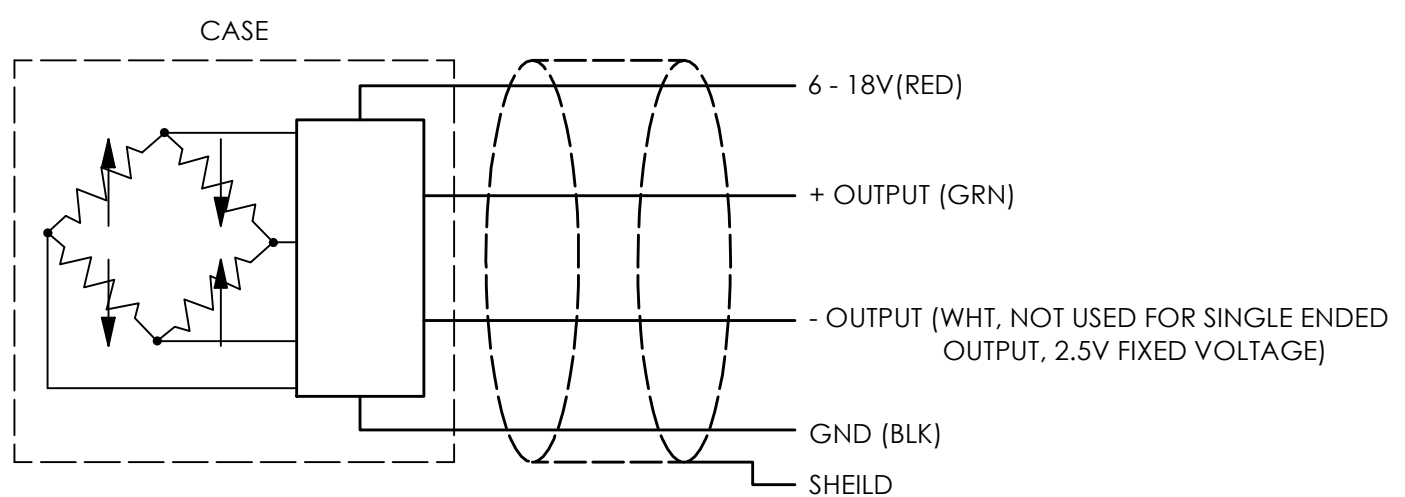
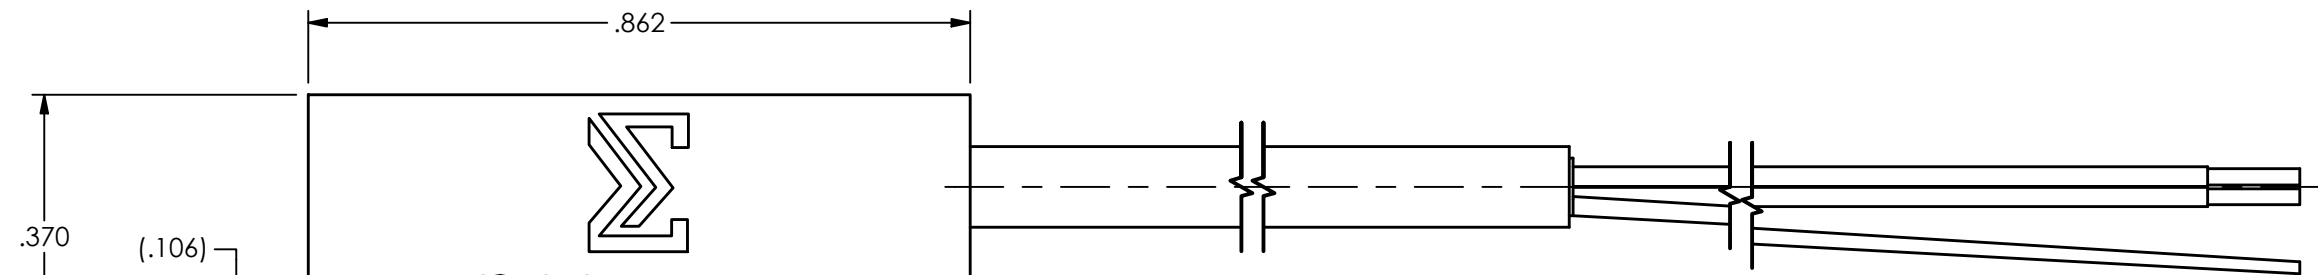


A

REV	DESCRIPTION	DIN
NR	RELEASED TO DRAFTING	55645

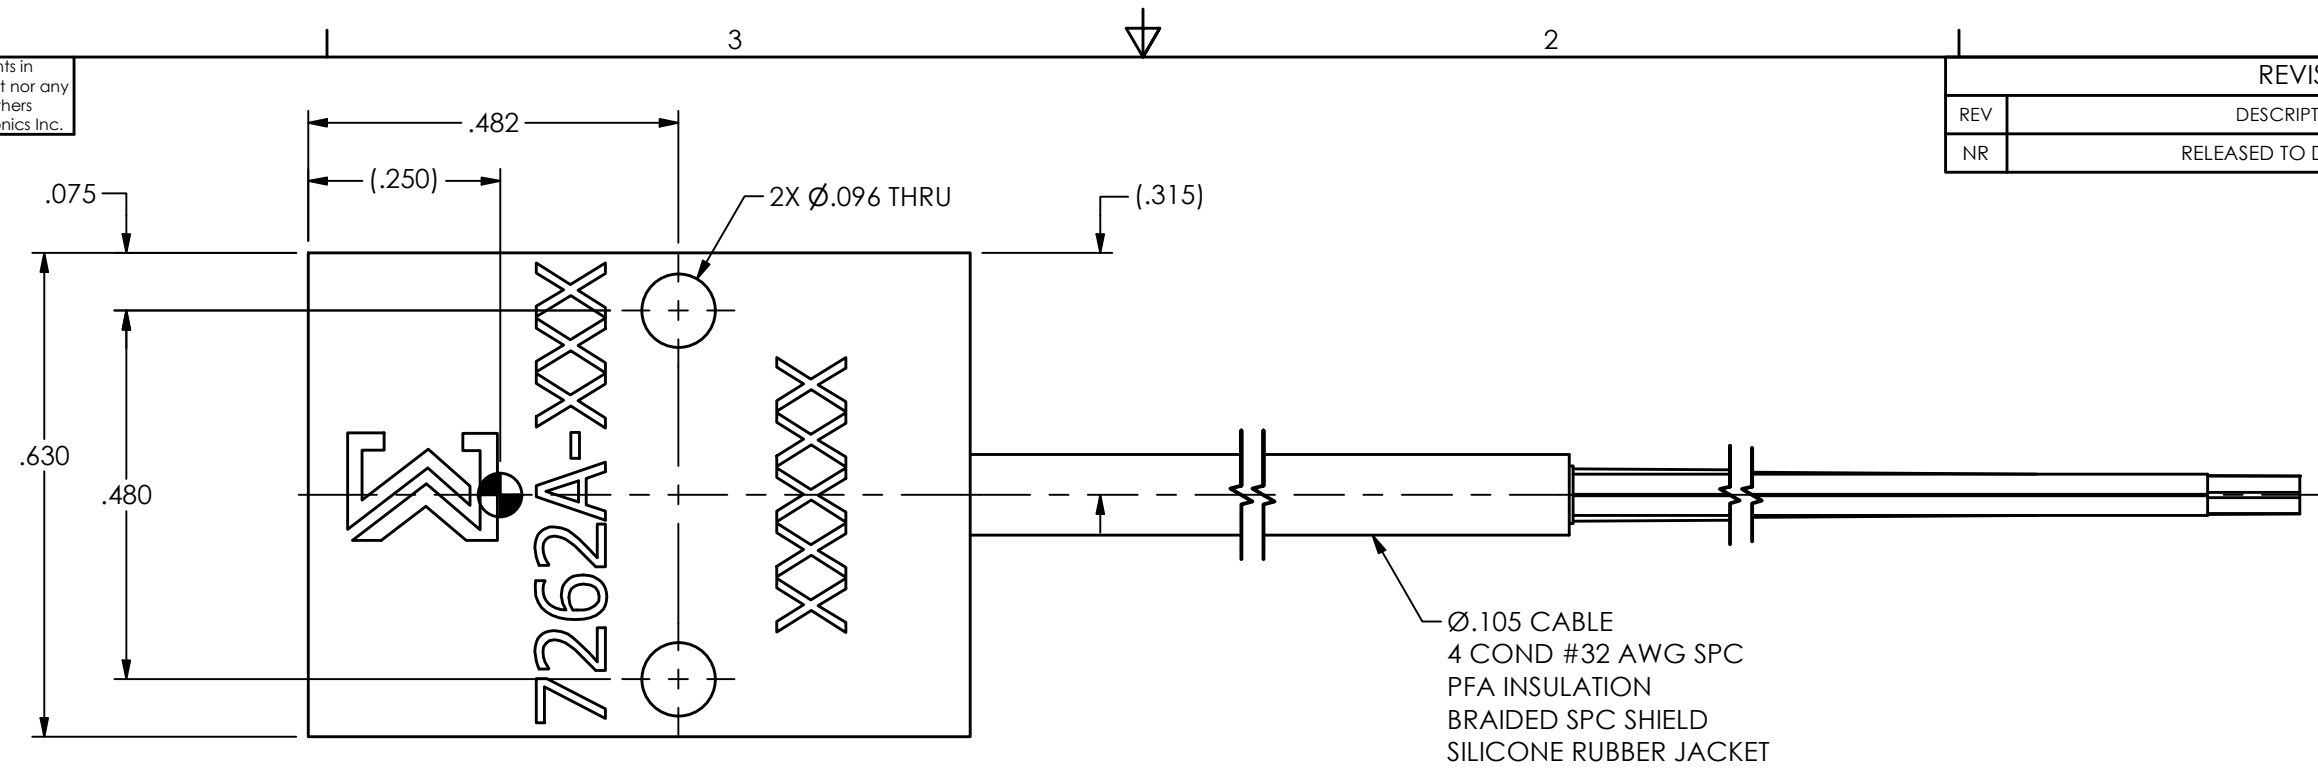

- BASIC MODEL NUMBER

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:				DRAWN		CHECKED		ENGINEER		 PCB PIEZOTRONICS AN AMPHENOL COMPANY 3425 WALDEN AVE. DEPEW, NY 14043 (716) 684-0001 E-MAIL: sales@pcb.com	
DIMENSIONS IN INCHES		DIMENSIONS IN MILLIMETERS [IN BRACKETS]		AME	5/7/25	JDM	5/7/25	JKN	5/7/25		
DECIMALS XX ±.03 XXX ±.010 ANGLES ± 2 DEGREES		DECIMALS X ± 0.8 XX ± 0.25 ANGLES ± 2 DEGREES		TITLE OUTLINE DRAWING MODEL 7262A PR ACCEL, 100G, AMPLIFIED OUTPUT							
CABLE TOLERANCES IN ENGLISH 1"≤ LENGTH < 1' = +1" / - 0 1'≤ LENGTH < 5' = +2" / - 0 5'≤ LENGTH < 100' = +6" / - 0 100'≤ LENGTH = +1' / - 0		CABLE TOLERANCES IN METRIC 2.54cm ≤ LENGTH < 30.5cm = +2.54cm / - 0 30.5cm ≤ LENGTH < 1.5m = +5.1cm / - 0 1.5m ≤ LENGTH < 30.5m = +15.2cm / - 0 30.5m ≤ LENGTH = +30.5cm / - 0									
FILLETS AND RADII .003 - .005		FILLETS AND RADII 0.07 - 0.13								CODE IDENT. NO. 52681	DWG. NO. 79880
				SCALE:		4X		SHEET		1 OF 1	