





80130

PCB Piezotronics Inc. claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Piezotronics Inc.


REVISIONS		
REV	DESCRIPTION	DIN
NR	RELEASED TO DRAFTING	55510

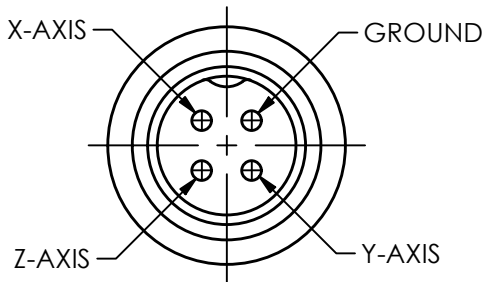


CONNECTOR PIN DESIGNATION
SCALE 4X

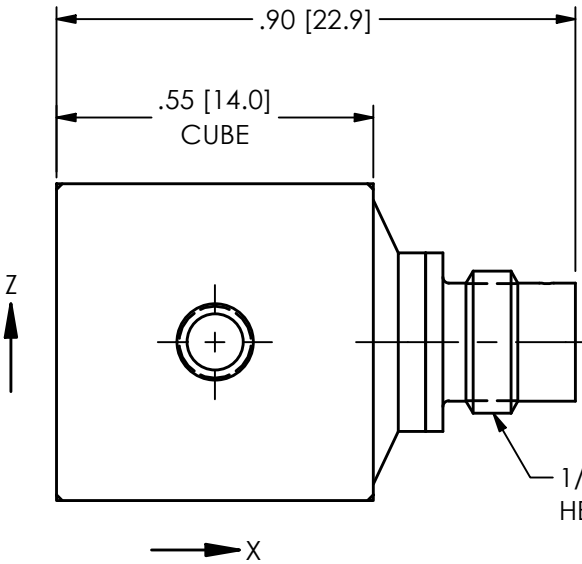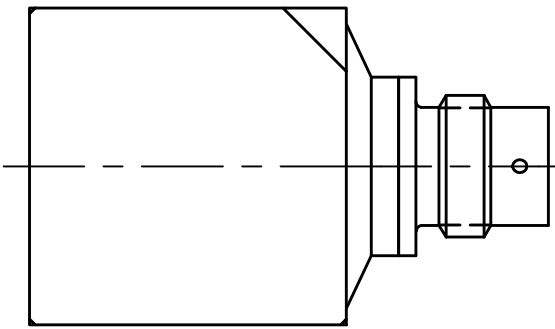

1/4-28 UNF - 2A
HERMETIC, 4-PIN CONNECTOR



Y

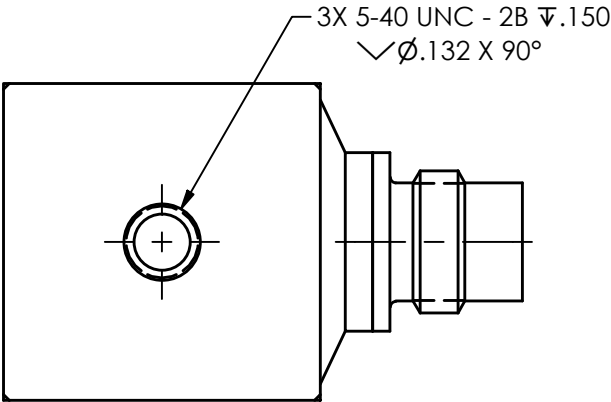

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:				DRAWN		CHECKED		ENGINEER		 PCB PIEZOTRONICS AN AMPHENOL COMPANY					
DIMENSIONS IN INCHES		DIMENSIONS IN MILLIMETERS 1 IN BRACKETS		AME	9/3/25	JDM	9/3/25	KDW	9/3/25	3425 WALDEN AVE. DEPEW, NY 14043 (716) 684-0001 E-MAIL: sales@pcb.com					
DECIMALS XX ±.03 XXX ±.010		DECIMALS X ±.08 XX ±.025		TITLE OUTLINE DRAWING MODEL 356M265 TRIAxIAL ICP® ACCELEROMETER						CODE IDENT. NO. 52681	SIZE B	DWG. NO. 80130			
ANGLES ± 2 DEGREES		ANGLES ± 2 DEGREES								SCALE: 3X		SHEET 1 OF 1			
CABLE TOLERANCES IN ENGLISH 1"≤ LENGTH < 1' = +1"/ - 0 1'≤ LENGTH < 5' = +2"/ - 0 5'≤ LENGTH < 100' = +6"/ - 0 100'≤ LENGTH = +1"/ - 0		CABLE TOLERANCES IN METRIC 2.54cm ≤ LENGTH < 30.5cm = +2.54cm/ - 0 30.5cm ≤ LENGTH < 1.5m = +5.1cm/ - 0 1.5m ≤ LENGTH < 30.5m = +15.2cm/ - 0 30.5m ≤ LENGTH = +30.5cm/ - 0													
FILLETS AND RADII .003 - .005		FILLETS AND RADII 0.07 - 0.13													