
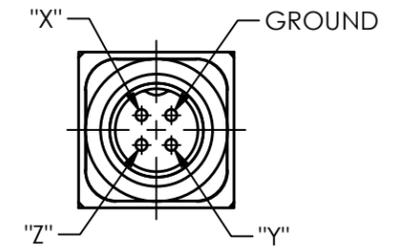
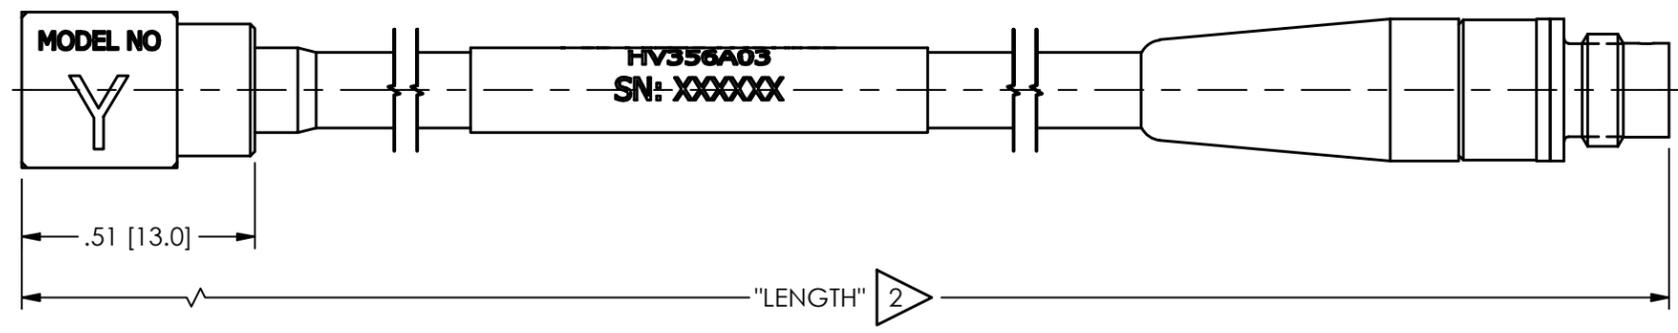


80845

PCB Piezotronics Inc. claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Piezotronics Inc.

REVISIONS		
REV	DESCRIPTION	DIN
A	CHANGED SQUARE TO CUBE	56392

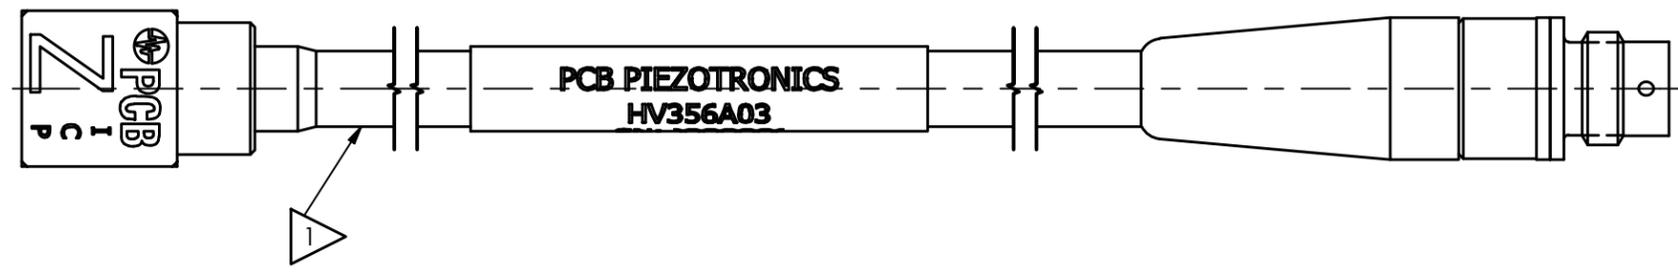

2 LENGTH WILL VARY IN FEET OR METERS DEPENDING ON THE MODEL
 1 HEAT SHRINK OUTER SLEEVE

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN		CHECKED		ENGINEER		PCB PIEZOTRONICS			
DIMENSIONS IN INCHES DECIMALS XX ±.03 XXX ±.010 ANGLES ± 2 DEGREES		DIMENSIONS IN MILLIMETERS [IN BRACKETS] DECIMALS X ± 0.8 XX ± 0.25 ANGLES ± 2 DEGREES		KRG	1/6/26	JDM	1/6/26	MJN	1/6/26	AN AMPHENOL COMPANY 3425 WALDEN AVE. DEPEW, NY 14043 (716) 684-0001 E-MAIL: sales@pcb.com	
CABLE TOLERANCES IN ENGLISH 1' ≤ LENGTH < 1' = +1' / - 0 1' ≤ LENGTH < 5' = +2' / - 0 5' ≤ LENGTH < 100' = +6' / - 0 100' ≤ LENGTH = +1' / - 0		CABLE TOLERANCES IN METRIC 2.54cm ≤ LENGTH < 30.5cm = +2.54cm / - 0 30.5cm ≤ LENGTH < 1.5m = +5.1cm / - 0 1.5m ≤ LENGTH < 30.5m = +15.2cm / - 0 30.5m ≤ LENGTH = +30.5cm / - 0		TITLE OUTLINE DRAWING .34" CUBE, 1/4-28 4-PIN CONNECTOR NON-CONDUCTIVE TRIAXIAL ACCELEROMETER				CODE IDENT. NO. 52681	SIZE B	DWG. NO. 80845	
FILLETS AND RADII .003 - .005		FILLETS AND RADII 0.07 - 0.13						SCALE: 2.5X	SHEET 1 OF 1		