


☞ ENDEVCO Piezoresistive Accelerometer

Model 7262A

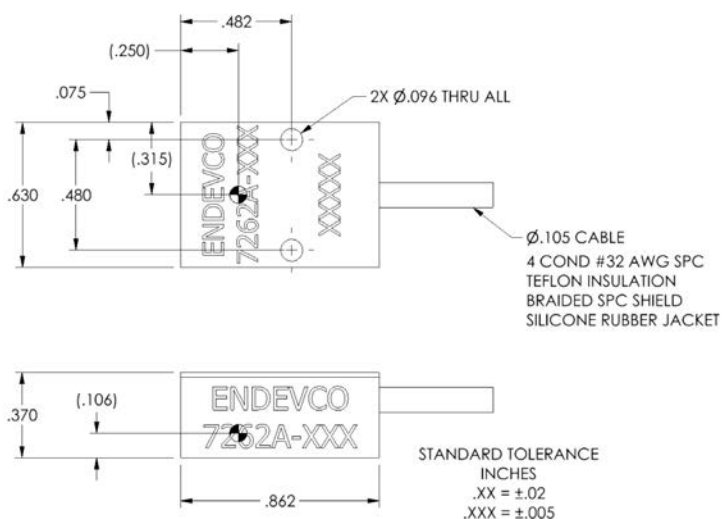

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:			
DIMENSIONS IN INCHES		DIMENSIONS IN MILLIMETERS [IN BRACKETS]	
DECIMALS	XX ±.03 XXX ±.010	DECIMALS	X ± 0.8 XX ± 0.25
ANGLES ± 2 DEGREES		ANGLES ± 2 DEGREES	
FILLETS AND RADII .003 - .005		FILLETS AND RADII 0.07 - 0.13	

Key features

Rugged piezoresistive accelerometer with voltage output

Typical 2% thermal sensitivity over military temperature range

IP67 for protection in outdoor testing

DC response and wide bandwidth

Rugged to 10,000g shocks

Description

The Endevco Model 7262A Piezoresistive Accelerometers are rugged, gas damped accelerometers with amplified output and internal temperature compensation. 7262A provides pseudo-differential output with the white lead having a constant bias of 2.5Vdc and the green lead 2.5 +/-2.0Vdc under acceleration. With a frequency response extending down to DC, this accelerometer is ideal for measuring long duration transient shocks. The anodized aluminum package is small and lightweight with an integral cable.

7262A comes standard with an A2LA accredited frequency response calibration at 10V with sensitivity and ZMO provided.

US patent 6,988,412 applies.

ENDEVCO Piezoresistive accelerometer | Model 7262A

All specifications are referenced at +75°F (+24°C) and 10 VDC, unless otherwise noted. Calibration data traceable to National Institute of Standards and Technology (NIST) is supplied.

Specifications				
Dynamic characteristics	Units	-100	-500	-1000
Range	g	±1000	±2000	±6000
Sensitivity (at 100Hz and 10g)	mV/g min / typ / max	4 / 5 / 6	1.6 / 2.0 / 2.4	1.6 / 2.0 / 2.4
Frequency Response ±5% maximum	Hz	0 to 2000	0 to 2000	0 to 2000
Non-linearity	%FSO typ	±2	±2	±2
Zero Measurand Output	mV max	±50	±50	±50
Transverse Sensitivity	% typ	2	2	2
Resonance Frequency	Hz	25,000	25,000	25,000
Thermal Zero shift -65 to +250°F (-54 to +121°C)	%FSO typ/max	±2 / ±4	±2 / ±4	±2 / ±4
Thermal Sensitivity Shift -65 to +250°F (-54 to +121°C)	% typ/max	±2 / ±4	±2 / ±4	±2 / ±4
Electrical characteristics				
Warm-up Time	2 minutes			
Excitation	6 to 18 VDC			
Output Impedance, max	200 ohms			
Current drain, max	5 mA			
Insulation Resistance	1 Mohm min 20 Vdc between case and shorted leads			
Residual Noise	500 uV RMS, 0.5 Hz to 10,000 Hz			
Physical characteristics				
Case, material	Anodized Aluminum			
Cable	Integral 4-Conductor, #32 AWG Teflon-insulated leads, shielded, silicone rubber jacket			
Mounting	Two 2-56 high strength screws, two #2 washes, recommended mounting torque 6 +/- 1 lbf-in (0.7 +/- 0.1 N-m)			
Weight	6 grams			
Environmental				
Acceleration limits (in any direction)				
Shock	10,000 g			
Temperature				
Operating	-54° to +121°C (-65° to +250°F)			
Storage	-54° to +121°C (-65° to +250°F)			
Humidity	Epoxy sealed; IP67			
ESD Sensitivity	Meets Class 3B (>8000 Volts) per JEDEC JS001			
Calibration				
Each sensor includes an ISO 17025 calibration with the below information:				
Sensitivity (ref 10g, 100Hz)				
ZMO				
Frequency Response (20 to 5000Hz, ref 100Hz)				

Accessories		
Options	Description	2262B
EDVEH597	2-56 x 1/2" socket head cap screws (2)	Included
EDVEHW200	Size 2 flat washers (2)	Included
EDVEHM178	5/64" Allen wrench	Included

Notes

1. Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 866-ENDEVCO for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.

Model number definition:

