


# Piezoresistive accelerometer

## Model 7280AM4

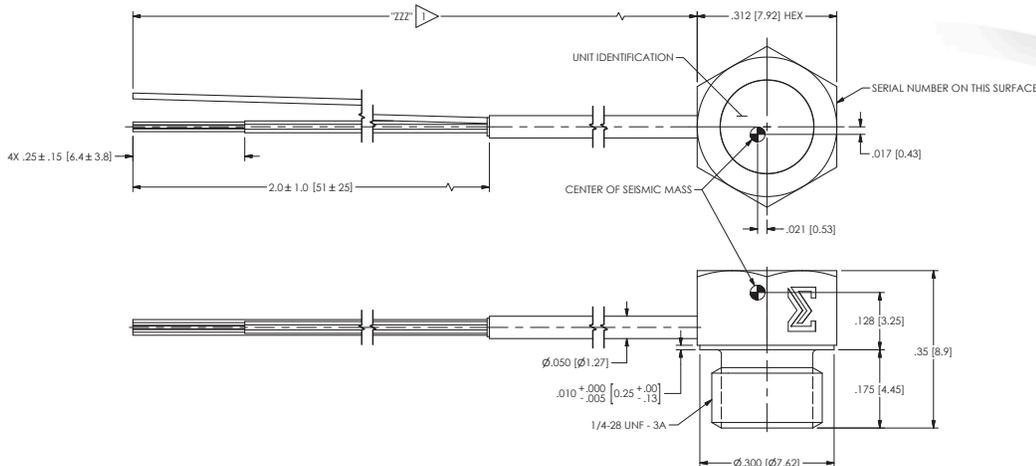

### Key features

- 2,000 g, 20,000 g and 60,000 g ranges
- Damped for exceptional survivability
- DC response
- Low power consumption
- -55°C to +121°C operating temperature
- Minimal zero shift after shock
- Pyrotechnic and penetration

### Description

The Endevco® model 7280AM4 is a family of rugged damped piezoresistive accelerometers designed for high amplitude acceleration, vibration and shock applications. The model 7280AM4 features minimal mass loading, broad frequency response, and minimum zero shift during a shock event.

The model 7280AM4 uses a unique micro-machined, piezoresistive sensor with light gas damping to attenuate resonant amplitudes, and mechanical stops to reduce breakage under overload conditions. The monolithic sensor incorporates the latest MEMS technology for ruggedness, stability and reliability to 4X full scale range. The accelerometer features a four-active arm bridge circuit. The M4 modification provides an integral ¼-28 mounting stud in a light 2.1 gram package. This increases the housing stiffness, which is important for short duration shock measurements.

See model 7280A for integral 4-40 screw mount configuration.

US patent 6,988,412 applies to this unit

## Piezoresistive accelerometer | Model 7280AM4

All specifications are referenced at +75°F (+24°C) and 10 Vdc, unless otherwise noted. Calibration data, traceable to National Institute of Standards and Technology (NIST), is supplied.



Specifications				
Dynamic characteristics	Units	-2K	-20K	-60K
Range	g	±2000	±20,000	±60,000
Sensitivity (at 5000g)				
Minimum/Typ/Max at 10Vdc	µV/g	150 / 300 / 600	8.0 / 16.0 / 24.0	2.5 / 5.0 / 7.5
Minimum/Typical/Maximum	µV/V/g	15 / 30 / 60	0.8 / 1.6 / 2.4	0.25 / 0.50 / 0.75
Frequency response				
± 1 dB	kHz	0 to 10	0 to 10	0 to 20
Natural frequency	kHz	25	100	130
Zero measurand output	mV/V	±20	±20	±20
Transverse sensitivity	%	3	3	3
Thermal zero shift (typ)				
-55 to 121°C	%FSO/°C	0.06	0.06	0.06
-67 to 250°F	%FSO/°F	0.033	0.033	0.033
Thermal sensitivity shift (typ)				
-55 to 121°C	%/°C	-0.2	-0.2	-0.2
-67 to 250°F	%/°F	-0.11	-0.11	-0.11
Electrical characteristics				
Excitation	Vdc	2 to 12 (10 standard)		
Resistance				
input	Ω	6500 ±2000	6500 ±2500	6500 ±2500
output	Ω	6500 ±2000	6500 ±2500	6500 ±2500
Isolation resistance		100 MΩ min at 50 VDC between leads (shorted together) and cable shield or case.		
Physical characteristics				
Case material		17-4 CRES		
Weight (excluding cable)		2.1 grams		
Cable		(4) 36 AWG SPC, shield, FEP jacket; cable weight 0.04 oz/ft (1.13 g/ft)		
Mounting		Integral 1/4-28 thread, 0.175 inch long mounting stud Recommended mounting torque, 30 ± 2 lbf-in (3.5 N-m)		
Environmental characteristics				
Shock Limit	g	±10,000	±80,000	±240,000
Temperature				
Operating	°C (F°)	- 55 to + 121 (- 67 to + 250)		
Storage	°C (F°)	- 55 to + 121 (- 67 to + 250)		
Calibration data				
Data for sensitivity, ZMO, input and output resistance are supplied on the calibration certificate. Unless specified by the customer at time of order, the default calibration will be performed at 10.0 Vdc excitation.				

# Piezoresistive accelerometer | Model 7280AM4

Accessories		
Options	Description	7280AM4
32103	Triaxial mounting block	Optional

## Notes

- Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 866-ENDEVCO for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.
- Model number definition:

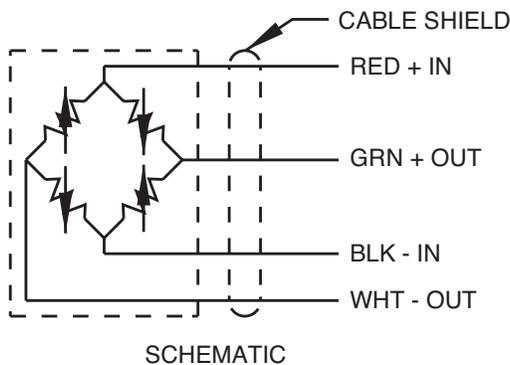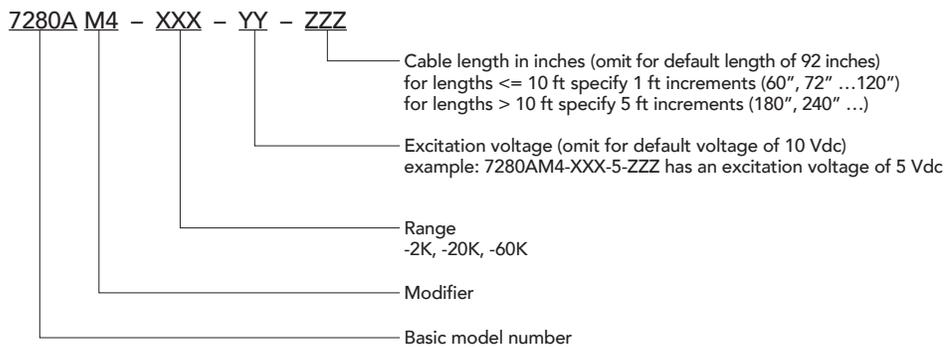

10869 NC Highway 903, Halifax, NC 27839 USA

endevco.com | sales@endevco.com | 866 363 3826

© 2024 PCB Piezotronics - all rights reserved. PCB Piezotronics is a wholly-owned subsidiary of Amphenol Corporation. Endevco is an assumed name of PCB Piezotronics of North Carolina, Inc., which is a wholly-owned subsidiary of PCB Piezotronics, Inc. Accumetrics, Inc. and The Modal Shop, Inc. are wholly-owned subsidiaries of PCB Piezotronics, Inc. IMI Sensors and Larson Davis are Divisions of PCB Piezotronics, Inc. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of PCB Piezotronics, Inc., PCB Piezotronics of North Carolina, Inc. (d/b/a Endevco), The Modal Shop, Inc. or Accumetrics, Inc. Detailed trademark ownership information is available at [www.pcb.com/trademarkownership](http://www.pcb.com/trademarkownership).