



Piezoelectric accelerometer

Model 2230E / 2230EM1

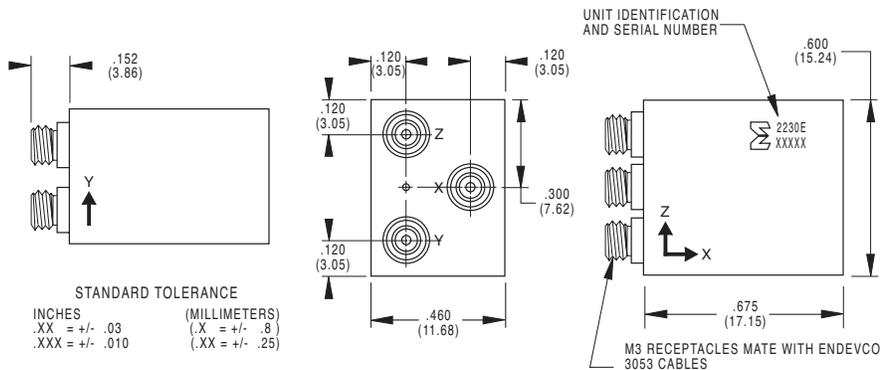

2230E

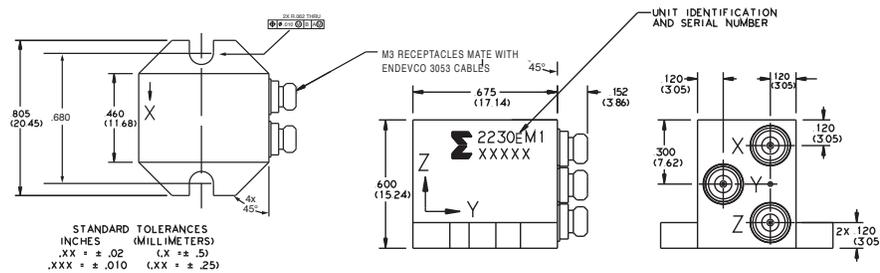

2230EM1

Key features

- Miniature high temperature triaxial, +500°F (+260°C)
- Light weight (17 gm /22.5 gm)
- Case grounded
- High temperature aerospace, industrial and automotive applications

Description

The Endevco® model 2230E/2230EM1 is a miniature triaxial piezoelectric accelerometer designed specifically for vibration measurement in three orthogonal axes on small structures and objects. The transducer features three M3 receptacles for output connection. The 2230E is designed to be mounted with adhesive. The 2230EM1 is mounted with two supplied cap screws. Its light weight effectively minimizes mass-loading effects. The accelerometer is a self-generating device that requires no external power source for operation.

The model 2230E/2230EM1 features Endevco's Piezite® Type P-8 crystal elements, operating in annular shear mode, which exhibit excellent output sensitivity stability over time. Signal ground is connected to case and mounting surface of the unit. Low-noise, flexible coaxial cables are supplied for error-free operation.

Piezoelectric accelerometer | Model 2230E / 2230EM1

The following performance specifications conform to ISA-RP-37.2 (1964) and are typical values, referenced at +75°F (+24°C), 4 mA and 100 Hz, unless otherwise noted. Calibration data, traceable to National Institute of Standards and Technology (NIST), is supplied

Specifications			
Dynamic characteristics	Units	2230E	2230EM1
Charge sensitivity			
Typical	pC/g		3.0
Minimum	pC/g		2.0
Frequency response			See typical amplitude response
Resonance frequency (typical)	kHz		21
Amplitude response [1]			
±5%	Hz	1 to 7,000	1 to 5,000
±1 dB	Hz	1 to 10,000	1 to 10,000
Temperature response			See typical curve
Transverse sensitivity	%		≤ 5
Amplitude linearity	%		1 per 500 g, 0 to 2000g
Electrical characteristics			
Output polarity		Acceleration in the direction of axis arrow produces positive output.	
Resistance	GΩ		≥10
Resistance at +500°F (+260°C)	MΩ		≥0.5
Capacitance	pF		770
Grounding		Signal return is connected to case.	
Environmental characteristics			
Temperature range		-67°F to +500°F (-55°C to +260°C)	
Humidity [2]		Hermetically sealed	
Sinusoidal vibration limit [3]	g pk		1,000
Shock limit [4]	g pk		2,000
Electromagnetic sensitivity	equiv. g rms/gauss		0.01
Physical characteristics			
Dimensions			See outline drawing
Weight	gm (oz)	17 (0.6)	22.5 (0.79)
Case material		304L stainless steel	
Connector		M3 x 0.5 6H thread, mates with Endevco 3053 cables	
Mounting torque	lbf-in (Nm)	NA	13.5 (1.25)
Calibration data			
Supplied:			
Charge sensitivity	pC/g		
Capacitance	pF		
Maximum transverse sensitivity	%		
Charge frequency response	%		20 Hz to 10 000 Hz

Piezoelectric accelerometer | Model 2230E / 2230EM1


Accessories					
Product	Description	2230E	2230E-R	2230EM1	2230EM1-R
3053V-120	Versaflex cable assembly, 10 ft (3x)	Included	Optional	Included	Optional
EH409	4-40 x .375 screws (2x)	N/A	N/A	Included	Included
2771C	In-line charge convertor	Optional	Optional	Optional	Optional
133	Signal conditioner	Optional	Optional	Optional	Optional

Options	
Options	Description
M2	Same as 2230E excepts ships with a 3053V-240 instead of 3053V-120


Notes

1. Low-end response of the transducer is a function of its associated electronics.
2. Short duration shock pulses, such as those generated by metal-to-metal impacts, may excite transducer resonance and cause linearity errors. Send for TP290 for more details.
3. Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 866-ENDEVCO for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.

TYPICAL AMPLITUDE RESPONSE, MODEL 2230E

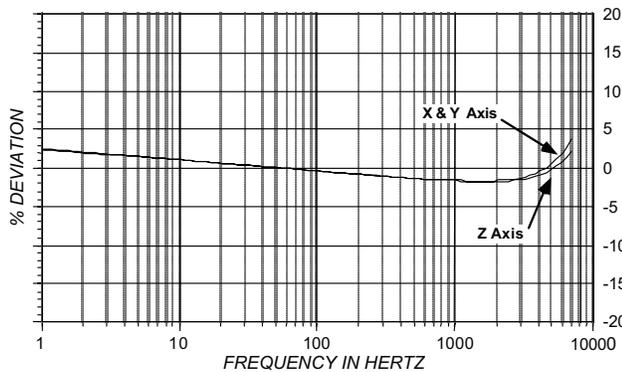

TYPICAL TEMPERATURE RESPONSE

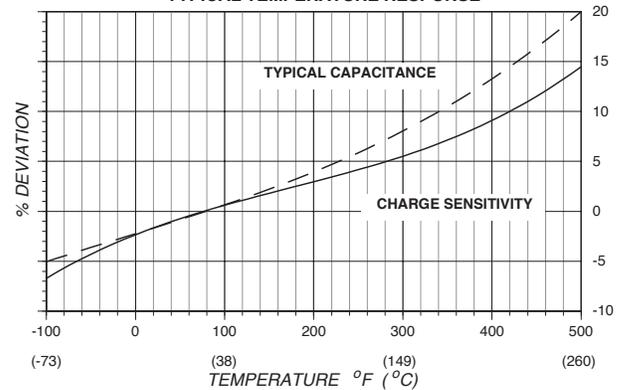

www.endevco.com | Tel: +1 (866) ENDEVCO [+1 (866) 363-3826] | 10869 NC-903, Halifax, NC 27839 USA

© 2020 PCB Piezotronics of North Carolina, Inc. (doing business as Endevco). In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. UHT-12TM is a trademark of PCB Piezotronics, Inc. SensorLineSM is a servicemark of PCB Piezotronics, Inc. MTS®, MTS Sensors logo, Temposonics®, SWIFT®, R Series V®, TempoLink®, and RefineMe® are registered trademarks of MTS Systems Corporation in the United States. These marks may be registered or otherwise protected in other countries. Endevco® is a registered trademark of PCB Piezotronics of North Carolina, Inc. d/b/a Endevco in the United States.

030620



Endevco is an assumed name of PCB Piezotronics of North Carolina, Inc. and is a designer and manufacturer of sensors, instrumentation, and cables for vibration, shock and pressure measurements, known for innovation of sensor technology for the automotive, aerospace and military markets. Visit www.endevco.com for more information. PCB Piezotronics of North Carolina, Inc. (doing business as Endevco) is a wholly owned subsidiary of PCB Piezotronics, Inc. PCB Piezotronics, Inc. is a designer and manufacturer of microphones, vibration, pressure, force, torque, load, and strain sensors, as well as the pioneer of ICP® technology used by design engineers and predictive maintenance professionals worldwide for test, measurement, monitoring, and control requirements in automotive, aerospace, industrial, R&D, military, educational, commercial, OEM applications, and more. With a worldwide customer support team, 24-hour SensorLineSM, and a global distribution network, PCB® is committed to Total Customer Satisfaction. Visit www.pcb.com for more information. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corporation. Additional information on MTS can be found at www.mts.com.